

Mechanische Muffe - WTC 1.5

Spleißmuffe WTC1.5/wasserdichte Muffe für LWL-Kabel

- 4 Kabelanschlüsse
- Mehrfach zugängliches, vollmechanisches, wasserdichtes System
- IP68 und Druckbeaufschlagung möglich
- Kapazität: bis zu 144 Warmschrumpfspleiße oder 96 Warmschrumpfspleiße und 8 Splitter
- UV-Schutz
- Mehrfachkabel-Dichtungssystem (bis zu 24 Kabel pro Anschluss)
- Standard oder stumpfe Midspan-Konfiguration

Anwendung

Das WTC-Spleißmuffen-Produktsortiment ist für die Kapselung von erdverlegten, unterirdischen und oberirdischen Kabelspleißen vorgesehen.

Die Hauptfunktionen sind

- Schutz von Spleißen und blanken Glasfasern vor Umwelteinflüssen und unbefugtem Zugriff
- Effiziente und einfache Ablage, Handhabung und Identifizierung von LWL-Spleißen und -Fasern

Product usage

Sealing system

- Fully mechanical sealing system for reduced installation and re-entry time.
- The top shell, sealed with a gasket, can be easily installed and removed without special tools or torque control.
- Cable sealing devices based on a mechanical compression system: this allows re-using all components for future upgrades or re-accessing to the closure. (No tape, glue, heat-shrink tubes, or cable jacket preparation is needed).

Cable clamping

3 points cable clamps for extremely high cable retention, or simplified 1 point clamping systems are available.

Grounding

Standard grounding assures electrical continuity between all cable ports (an external grounding plug is also available)

Fibre management

Several fibre management solutions and configurations are available for loose tube, tight buffer or ribbon cable storage



STANDARDS

Aginode specification

and management:

- Standard splice trays
- FiberArt
- Splitter splice tray

All configurations are modular and easy upgradable.


Cabling configuration

- Standard
- Butt Mid-span


Characteristics

Material	Thermoplastic closure shell
Maximum Splice capacity	<p>Depending of the application and the type of splice tray:</p> <ul style="list-style-type: none"> • Up to 72 Heat-shrink splice protections, organized in 6 standard splice trays • Up to 96 Heat-shrink splice protections and 8 splitters 1x8 (8 splitter splice trays) • Up to 144 Heat shrink splice protection, 12 splice trays <p>All splice trays are compatible with G652D fibre (minimum bending radius of 30mm)</p>
Cable ports	<ul style="list-style-type: none"> • 4 Standard port <p>or</p> <ul style="list-style-type: none"> • 2 Standard port + 2 butt mid-span ports <p>See the Sealing product range datasheet for the number and diameter of cables</p>
Degrees of protection	<p>IP68 (500 mbar flash test)</p> <p>IK10</p>
Sealing system	<p>Top shell: mechanical sealing (8 screws – no torque control)</p> <p>Cable ports: mechanical sealing (elastomer compression system)</p>
Operating temperature	-35 / +70°C
Splice supports	Heat-shrink, ANT, Focs, 3M, and mass splice protections
Dimensions	L 357 mm x W 191 mm x H 147 mm

Diagram

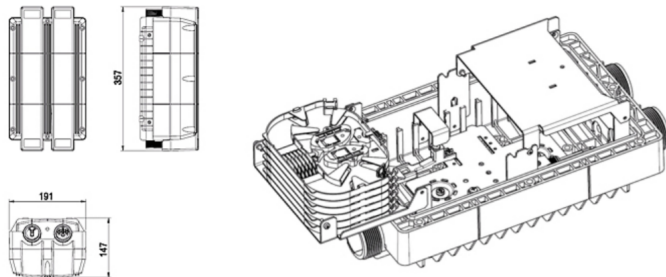

Versions

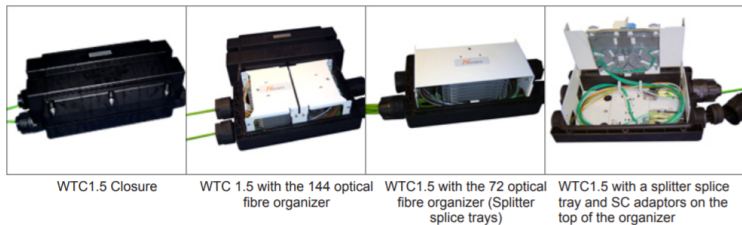

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Product list

	Aginode ref.	Country ref.	Name
☒	10075111	-	Pole/Wall mounting bracket WTC1.5

☒ = Make to order, ☒ = In Stock

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.