
Railways - Multibundle K209B cables

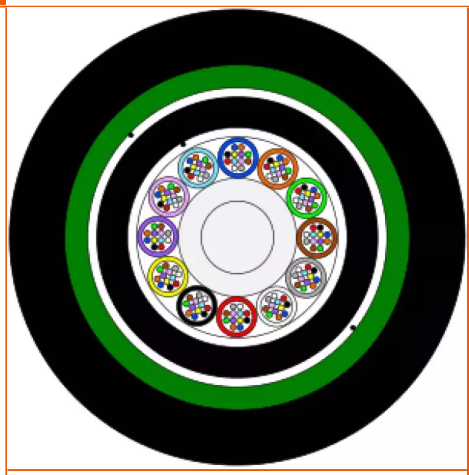

Multi Micro-bundles cable with corrugated steel armour:

- SP1344 - up to 36 fibres modulo 6
- SP1400 - up to 48 fibres modulo 6
- SP1349 - up to 72 fibres modulo 12
- SP1757 - up to 96 fibres modulo 12
- SP1758 - up to 144 fibres modulo 12
- SP1921 - up to 288 fibres modulo 12

This multi micro-bundles cable is designed for indoor/outdoor installation in railways infrastructure.

The corrugated steel armour provides a high rodent protection. This cable has an outstanding fire behaviour.

Access to µbundles is made easy with the internal ripcord.

This cable can be operated under a large temperature range.

STANDARDS

EN 50399 B2
IEC 60331-2
IEC 60332-1
IEC 60332-3
IEC 60754-1
IEC 60794
IEC 61034
NF C32-070/C1

Design

The MBC LSZH* cable has a central strength member (FRP : Fibre Reinforced Plastic), with bundles (maximum 6 fibres per bundle) around. The design is reinforced by a first layer of watertight glass, a LSZH* inner sheath, a second layer of watertight glass yarns, a corrugated steel armour and a LSZH* outer steath.

Fibre type

The MBC LSZH* cable is available with singlemode and multimode fibres.

Technical performances

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

The multibundle cable performances are specified in the following tables.

Additional details

This cable is provided as a standard with a black sheath, other sheath colours are also available. Long exposure to UV with these other colours could generate colour fading.

The sheathing material is compliant with ISO 4892-2 regarding the UV exposure.

The cable is compliant with NFPA - IEEE1202 &UL1685.

Euroclass

$B2^{ca}$ S1a a1 d0

* LSZH: Low Smoke Zero Halogen.

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Railways - Multibundle K209B cables

EIGENSCHAFTEN

Konstruktionsmerkmale	
Farbe	Schwarz
Fasertyp	SM (G657.A2)
Armierung	gewellter Stahl
Außenmantel	LSZH
Halogenfrei	IEC 60754-1
Metallfrei	No
Zugentlastungselement	Central FRP
Leitungsaufbau	Multibundle
Additional strength member	Glass yarn
Abmessungsmerkmale	
Anzahl der Bündel	6
Anzahl der optischen Fasern	72
Mechanische Eigenschaften	
Mechanische Festigkeit gegen Schläge	10 impacts of 1 N.m
Querdruckwiderstand (IEC 794-1-E3)	300 N/cm
Anwendungsmerkmale	
Nagetierschutz	Corrugated steel tape
Betriebstemperatur	-20...60 °C
Feuerbeständig	NF C 32-070 CR1
flammwidrig	IEC 60332-3
Flammwidrig	IEC 60332-1
Rauchdichte	IEC 61034-2
UV Beständigkeit	Good
Art der Installation	Indoor/Outdoor
Umgebungstemperatur, Bereich	-20...60 °C
Wasserdicht	Längs- und quer-

Verkauf & Lieferung Informationen

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Standard Marking

Aginode - FIBRE OPTIC CABLE - MBC LSZH SP1400 - XXxYY - FB - TN - metric

XX = Fibre Count YY = Fibre Type FB = Frameries, Belgium (manufacturing place) TN = Traceability Number

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Product list

Aginode ref.	Country ref.	Name	Anzahl der optischen Fasern	Mechanische Festigkeit gegen Schläge	Querdruckwiderstand (IEC 794-1-E3)
14500598	-	MBC LSZH K209B 6x12SM G657A2 SP1349 BK	72	10 impacts of 1 N.m	300 (N/cm)
	-	MBC K209B LSZH 24x6SM SP1921 BK	144	3 impacts of 5 N.m	200 (N/cm)
10548533	-	MBC LSZH K209B 6xSM G652D SP1344 BK	6	10 impacts of 1 N.m	300 (N/cm)
10145800	-	MBC LSZH K209B 2x6SM G652D SP1344 BK	12	10 impacts of 1 N.m	300 (N/cm)
	-	MBC LSZH K209B 1x6 50/125 OM3 SP1344 GN	6	10 impacts of 1 N.m	300 (N/cm)
10507006	-	MBC LSZH K209B 6x50/125 OM3 SP1344 BK	6	10 impacts of 1 N.m	300 (N/cm)
tdb	-	MBC LSZH K209B 4x50/125 OM3 SP1344 BK	4	10 impacts of 1 N.m	300 (N/cm)
10562651	-	MBC K209B LSZH 288xSM G657A2 SP1921 GY	288	3 impacts of 5 N.m	200 (N/cm)
10513197	-	MBC LSZH K209B 6x12SM G652D SP1349 BK	72	10 impacts of 1 N.m	300 (N/cm)
10508928	-	MBC LSZH K209B 4x6SM + 4x6MM SP1400 BK	48	10 impacts of 1 N.m	300 (N/cm)
10508458	-	MBC K209c LSZH 8x12SM G652D SP1757 BK	96	10 impacts of 1 N.m	300 (N/cm)
10509235	-	MBC K209 LSZH 12x12SM G652D SP1758 BK	144	10 impacts of 1 N.m	300 (N/cm)
10504788	-	MBC LSZH K209B 6x6SM G652D SP1344 BK	36	10 impacts of 1 N.m	300 (N/cm)
10545733	-	MBC LSZH K209B 2x6 50/125 OM3 SP1344 BK	12	10 impacts of 1 N.m	300 (N/cm)

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

	Aginode ref.	Country ref.	Name	Anzahl der optischenFasern	Mechanische Festigkeit gegen Schläge	Querdruckwiderstand (IEC 794-1-E3)
	10218921	-	MBC LSZH K209B 6x12SM G652D SP1349 BK	48	10 impacts of 1 N.m	300 (N/cm)
	14500004	-	MBC K209B LSZH 24x12SM G657A2 SP1921 GY	288	3 impacts of 5 N.m	200 (N/cm)
	MBC K209B LSZH 18x12SM SM SP1921 BK	-	MBC K209B LSZH 288xSM G657A2 SP1921 GY	192	3 impacts of 5 N.m	200 (N/cm)

= Make to order, = In Stock

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.