

Distribution - Microbundle cables Cca

Multi Micro-bundles cable - up to 96 fibres

This multi micro-bundles cable is designed for indoor/outdoor usage and can be installed by pulling or blowing thanks to a low friction LSZH outersheath (typical blowing distance 500m)

This cable has an outstanding fire behaviour.

This cable can be operated under a large temperature range.

Design

The MB LSZH* SP1880 cable has a central strength member (FRP : Fibre Reinforced Plastic), with max. 8 bundles of 12 fibres each. The design is reinforced by a layer of glass yarns and a LSZH* sheath.

Fibre type

The MB LSZH* SP1880 cable is available with singlemode and multimode fibres.

Technical performances


The multibundle cable performances are specified in the following tables.

Additional details

This cable is provided as a standard with a black sheath, other sheath colours are also available. Long exposure to UV with these other colours could generate colour fading.

Euroclass

B2ca s1 d0 a1

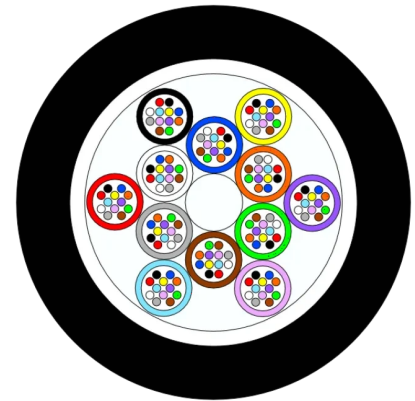

STANDARDS

EN 50399
IEC 60332-1
IEC 60754-1
IEC 60794
IEC 61034
NF C32-070/C2

* LSZH: Low Smoke Zero Halogen.

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Distribution - Microbundle cables Cca

EIGENSCHAFTEN

Konstruktionsmerkmale

Farbe	Schwarz
Fasertyp	SM (G657.A1)
Außenmantel	LSZH
Halogenfrei	IEC 60754-1
Metallfrei	Yes
Zugentlastungselement	Central FRP
Leitungsaufbau	Multibundle
Additional strength member	Glass yarn

Abmessungsmerkmale

Anzahl der Bündel	4
Anzahl der optischen Fasern	48
Durchmesser, Bereich	5.9...9.3 mm
Anzahl der optischen Fasern, Bereich	12...144

Mechanische Eigenschaften

Mechanische Festigkeit gegen Schläge	10 impacts of 1 N.m
Querdruckwiderstand (IEC 794-1-E3)	100 N/cm
Maximale Zugspannung bei Installation	1000 N

Anwendungsmerkmale

Betriebstemperatur	-20...60 °C
flammwidrig	IEC 60332-3
Flammwidrig	IEC 60332-1
Rauchdichte	IEC 61034-2
UV Beständigkeit	Very good
Lagertemperatur, Bereich	-40...60 °C
Art der Installation	Indoor/Outdoor
Umgebungstemperatur, Bereich	0...40 °C
Wasserdicht	Radial

Verkauf & Lieferung Informationen

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Standard Marking

Aginode - FIBRE OPTIC CABLE - MB-B2 LSZH B2ca s1 d0 a1 SP1880 - XXxYY - FB - TN - metric

XX = Fibre Count

YY = Fibre Type

FB = Frameries, Belgium (manufacturing place)

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Product list

Aginode ref.	Country ref.	Name	Farbe	Fasertyp	Anzahl der optischen Fasern	Anzahl der Bündel
☎ 10569870	-	MB LSZH 4x12SM G657A1 SP1880 BK (CC1/N)	Schwarz	SM (G657.A1)	48	4
☎ 10571347	-	MB LSZH 4x6SM G657A2 SP1880 IV	Ivory	SM (G657.A2)	24	4
☎ 10542212	-	MB LSZH 8x12SM G657A1 SP1880 BK	Schwarz	SM (G657.A1)	96	8
☎ 10537788	-	MB LSZH 4x12SM G657A1 SP1880 BK	Schwarz	SM (G657.A1)	48	4
☎ 10573102	-	MB LSZH 6x12SM G657A1 SP1880 IV	Schwarz	SM (G657.A2)	72	6
☎ 10563544	-	MB LSZH 12x12SM G657A2 SP1880 BK (N)	Schwarz	SM (G657.A2)	144	12
☎	-	MB LSZH 12x12SM G657A2 SP1880 IV (N)	Ivory	SM (G657.A2)	144	12
☎ 10574266	-	MB LSZH 2x12SM G657A2 SP1880 IV	Ivory	SM (G657.A2)	24	2
☎ 10572702	-	MB LSZH 3x12SM G652D SP1880 BK	Schwarz	SM (G.652D)	36	3
☎ 10543739	-	MB LSZH 8x12SM G657A1 SP1880 BK - copy	Schwarz	SM (G657.A1)	144	12
☎	-	MB LSZH 8x12SM G657A2 SP1880 IV	Ivory	SM (G657.A2)	96	8
☎	-	MB LSZH 4x12SM G657A2 SP1880 BK	Ivory	SM (G657.A2)	48	4

☎ = Make to order, 📦 = In Stock