

LANmark-OF MPO-MPO 光纤跳线 LSZH GB31247-B1

- 安捷诺 MPO 跳线采用纤细线缆设计，外径仅为 3mm，节约机柜前方理线空间。
- 安捷诺 MPO 连接器的光学性能优于行业水平，符合国际标准。
- 12芯室内柔性光缆
- 采用抗弯曲单模光纤或 OM3/OM4 光纤
- LSZH 护套材料，满足 GB 31247 B1 (D0,T0,A1) 标准要求
- 直通极性 (Type B 型) 符合 TIA 568.3 -E 标准，Key Up/Key UP 方向
- 跳线两端均为母头 MPO 连接器

应用

安捷诺 MPO 跳线专为支持 40G、100G、200G 和 400G

等数据中心高速网络应用而设计。安捷诺的低损

耗光学性能可支持至少 6 个 MPO 连

接，以便在超大型数据中心中使用中间分配器。MPO 光缆针对外径进行了优化，并保持良好的拉力和挤压性能。每条 MPO 干线出厂时都附有测试报告，以确保性能。

功能特点

MPO 连接器符合 IEC 61754-7-1 和 GR-1435-CORE 标准

多模 MPO 连接器为 PC 型，单模 MPO 连接器为 APC 型

光缆护套采用 LSZH 材料，符合 GB31247-B1 (D0, T0, A1) 标准

光纤符合 IEC 60793-2-10 (A1a.2b OM3 和 A1a.3b OM4)、IEC

60793-2-50 (B6_a1) 和 ITU-T G.657.A1 单模标准。

光学性能和极性


低损等级多模 MPO 连接器，典型插入损耗为 0.2dB，最大插入损耗为 0.35 dB。

低损等级单模 MPO 连接器，典型插入损耗为 0.35dB，最大插入损耗为 0.5dB。

MPO 连接器的插入损耗是根据 IEC 61300-3-45 标准测量的。

多模 MPO 连接的最小回波损耗为 20 dB，单模 MPO 连接的最小回波损耗为 55 dB。

MPO 连接器的回波损耗根据 IEC 61300-3-6 标准测量的。

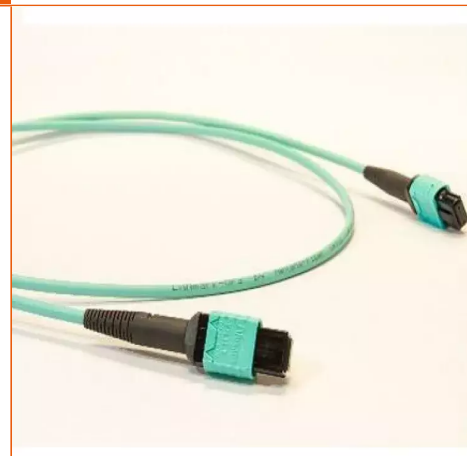

STANDARDS

ISO/IEC 11801

ANSI/TIA-568.3-D

LANmark-OF MPO-MPO 光纤跳线 LSZH GB31247-B1

CHARACTERISTICS

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

