
LWL Außenkabel mit zentraler Bündelader

Die Außenkabel mit zentraler Bündelader werden in Zugangs-, Verteil-, und sonstigen FTTx Netzen benutzt. Die Installation erfolgt durch Einziehen oder Einblasen in Rohranlagen. Versionen für direkte Erdverlegung sind ebenfalls erhältlich.



STANDARDS

IEC 60794

Eigenschaften

- Einfache Installation dank des geringen Reibungskoeffizienten des Kabelmantels
- Robustes Design
- Wasserdicht

Fasertypen

Die Kabel können mit verschieden Fasertypen geliefert werden.

Aufbau

- Gelgefüllte zentrale Bündelemente.
- Bewehrung aus Glasgarn und/oder Stahlrillband , je nach Version
- Quellelemente
- Kabelmantel aus PE mit geringem Reibungskoeffizient


All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

LWL Außenkabel mit zentraler Bündelader

EIGENSCHAFTEN

Konstruktionsmerkmale	
Fasertyp	SM
Leitungsaufbau	Unitube
Abmessungsmerkmale	
Anzahl der Bündel	1
Anzahl der optischen Fasern	24
Anwendungsmerkmale	
Lagertemperatur, Bereich	-40...70 °C
Art der Installation	Rohranlagen
Umgebungstemperatur, Bereich	0...40 °C
Biegefaktor bei Verlegung	20 (xD)

Resources

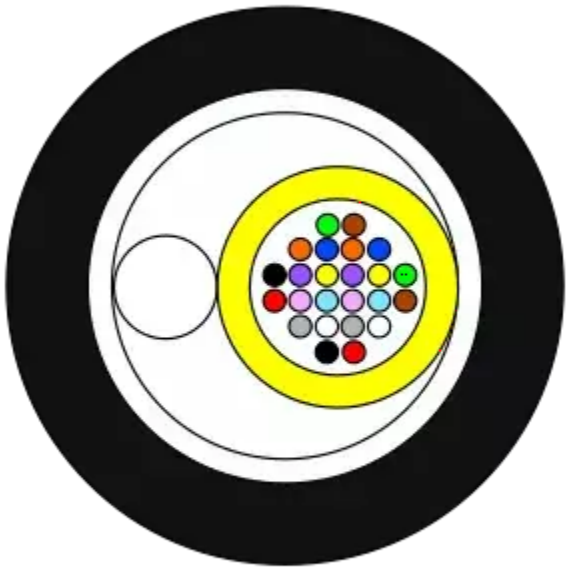

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Verkauf & Lieferung Informationen

Standard Marking

Aginode - FIBRE OPTIC CABLE - SPxxxx - XXxYY - FB - TN - metric

XX = Fibre Count
YY = Fibre Type
FB = Frameries, Belgium (manufacturing place)
TN = Traceability Number

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Product list

	Aginode ref.	Country ref.	Name	Armierung	Fasertyp	Anzahl der optischen Fasern	Anzahl der Bündel
		-	Unitube Cable 1x24SM SP1647	Glasgarn	SM	24	1
	10231297	-	Unitube Cable 1x12SM SP1647	Glasgarn	SM (G.652D)	12	1

= Make to order, = In Stock

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.