


Riser - Microbundle cables Cca

Multi Micro-bundles cable - up to 144 fibres

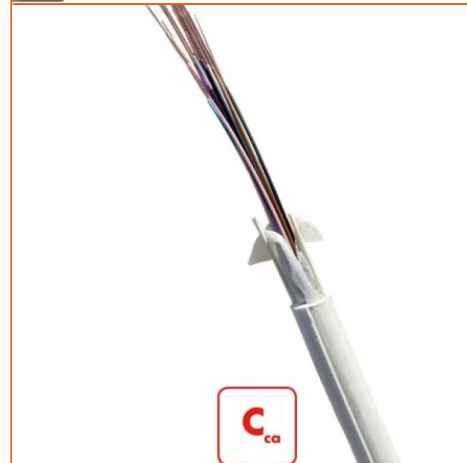

STANDARDS

EN 50399
IEC 60332-1
IEC 60332-3
IEC 60754-1
IEC 60794
IEC 61034

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Riser - Microbundle cables Cca

EIGENSCHAFTEN

Konstruktionsmerkmale

Farbe	Ivory
Fasertyp	SM (G657.A2)
Außenmantel	LSZH
Halogenfrei	IEC 60754-1
Metallfrei	Yes
Zugentlastungselement	Embedded FRP
Leitungsaufbau	Multibundle

Abmessungsmerkmale

Anzahl der Bündel	2
Anzahl der optischen Fasern	24
Durchmesser, Bereich	... mm
Anzahl der optischen Fasern, Bereich	24...144

Mechanische Eigenschaften

Mechanische Festigkeit gegen Schläge	10 impacts of 1 N.m
Querdruckwiderstand (IEC 794-1-E3)	100 N/cm

Anwendungsmerkmale

Betriebstemperatur	-20...60 °C
Flammwidrig	IEC 60332-1
Rauchdichte	IEC 61034-2
Lagertemperatur, Bereich	-40...60 °C
Art der Installation	Indoor
Umgebungstemperatur, Bereich	0...40 °C

Verkauf & Lieferung Informationen

Standard Marking

Nexans - FIBRE OPTIC CABLE - MB-C LSZH Cca s1 d0 a1 SPXXXX - XXxYY - FB - TN - metric

XX = Fibre Count














YY = Fibre Type

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

FB = Frameries, Belgium (manufacturing place)

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Product list

Aginode ref.	Country ref.	Name	Farbe	Fasertyp	Anzahl der optischen Fasern	Anzahl der Bündel	Querdruckwiderstand (IEC 794-1-E3)
	-	MB-Cca LSZH 2x12SM G657A2 SP1898	Ivory	SM (G657.A2)	24	2	100 (N/cm)
	-	MB-Cca LSZH 24x4SM G657A1 SP1900 IV	Ivory	SM (G657.A1)	96	24	150 (N/cm)
	-	MB-Cca LSZH 24x2SM G657A1 SP1899 IV	Ivory	SM (G657.A1)	48	24	150 (N/cm)
 10548535	-	MB-Cca LSZH 4x12 SM G657A2 SP1898 IV	Ivory	SM (G657.A2)	48	4	150 (N/cm)
	-	MB-Cca LSZH 24x6SM G657A1 SP1893 IV	Ivory	SM (G657.A1)	144	24	100 (N/cm)
	-	MB-Cca LSZH 4x12SM G657A2 SP1898	Ivory	SM (G657.A2)	48	4	100 (N/cm)
	-	MB-Cca LSZH 8x12SM G657A2 SP1898	Ivory	SM (G657.A2)	96	8	100 (N/cm)
	-	MB-Cca LSZH 12x12SM G657A2 SP1898	Ivory	SM (G657.A2)	144	12	100 (N/cm)
 10567548	-	MB-Cca LSZH 4x6SM G657A2 SP1893	Ivory	SM (G657.A2)	24	4	150 (N/cm)
	-	MB-Cca LSZH 8x6SM G657A2 SP1893	Ivory	SM (G657.A2)	48	8	150 (N/cm)
	-	MB-Cca LSZH 12x6SM G657A2 SP1893	Ivory	SM (G657.A2)	72	12	150 (N/cm)
 10567581	-	MB-Cca LSZH 24x6SM G657A2 SP1893	Ivory	SM (G657.A2)	144	24	150 (N/cm)
	-	MB-Cca LSZH 2x6SM G657A2 SP1893	Ivory	SM (G657.A2)	12	2	150 (N/cm)

 = Make to order,  = In Stock

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.