

essential-OF TB LSZH 2-24C - APAC Region

Tight buffered optical fibre cables

- Indoor cable designed for backbone/horizontal installation
- Available in OM3 and SingleMode G.652.D
- Outer Jacket is Low Smoke Zero Halogene (LSZH)

Description and Application

Essential-OF TB Indoor fibre cable is designed for indoor applications especially for building. The fibre cable has 900µm tight buffered fibres. The cable is coated with aramid yarns, and the outer jacket is LSZH with good fire performance. Essential-OF TB is available for Bend Insensitive OM3 and SingleMode G.652.D.


The fibre cable is of a dry structure suitable for horizontal or vertical installation. The fibre cable meets the needs of indoor fire protection and can be installed in ducts.

- Can be installed both vertically or horizontally
- Applicable as standard multimode and singlemode fibre
- LSZH Jacket
- Tight buffered fibre

Construction

Legend accompanying the cross section drawing for 2-24core OF cable:

1. 900µm Tight buffered fibre
2. Aramid yarn
3. LSZH jacket materials

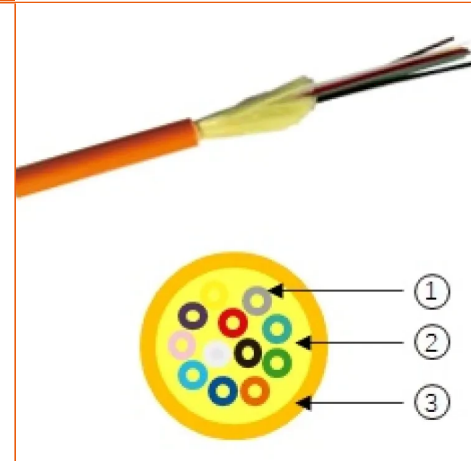

STANDARDS

- ANSI/TIA-568-C.3
- IEC 60332-1
- IEC 60332-3-24 Cat.C
- IEC 60793-2-10
- ISO/IEC 11801

essential-OF TB LSZH 2-24C - APAC Region

EIGENSCHAFTEN

Konstruktionsmerkmale

Farbe	Gelb
Fasertyp	SM (G.652D)

Abmessungsmerkmale

Aussendurchmesser	6 mm
Anzahl der optischen Fasern	12

Mechanische Eigenschaften

Mechanical resistance to impacts (IEC 60794-1-E4)	100 impacts of 1 N.m
Crush resistance (IEC 60794-1-E3)	1000 N/100mm
Max. Zugkraft (IEC 60794-1-2-E1)	440 N

Anwendungsmerkmale

Betriebstemperatur	-20...60 °C
Dynamischer Mindestbiegeradius während Anwendung	120.0 mm
Mindestbiegeradius bei statischem Einsatz	60 mm
Lagertemperatur, Bereich	-20...60 °C
Umgebungstemperatur, Bereich	0...40 °C

Product list

	Aginode ref.	Country ref.	Name
☎	N274.TBIN12Y	-	Essential-OF Tight Buffer LSZH SM G.652.D 12C YELLOW
☎	N275.TBIN02O	-	Essential-OF Tight Buffer LSZH BI OM3 2C ORANGE
☎	N275.TBIN04O	-	Essential-OF Tight Buffer LSZH BI OM3 4C ORANGE
☎	N274.TBIN02Y	-	Essential-OF Tight Buffer LSZH SM G.652.D 2C YELLOW
☎	N274.TBIN08Y	-	Essential-OF Tight Buffer LSZH SM G.652.D 8C YELLOW
☎	N275.TBIN24O	-	Essential-OF Tight Buffer LSZH BI OM3 24C ORANGE
☎	N275.TBIN12O	-	Essential-OF Tight Buffer LSZH BI OM3 12C ORANGE
☎	N274.TBIN04Y	-	Essential-OF Tight Buffer LSZH SM G.652.D 4C YELLOW
☎	N274.TBIN06Y	-	Essential-OF Tight Buffer LSZH SM G.652.D 6C YELLOW
☎	N275.TBIN08O	-	Essential-OF Tight Buffer LSZH BI OM3 8C ORANGE
☎	N274.TBIN24Y	-	Essential-OF Tight Buffer LSZH SM G.652.D 24C YELLOW
☎	N275.TBIN06O	-	Essential-OF Tight Buffer LSZH BI OM3 6C ORANGE

☎ = Make to order, 📦 = In Stock

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.