

UPSKY™ preterminated cable singlemode & multimode

- Single-mode and multimode fibres in the same cable
- 24/48/72 fibres
- High mechanical resistance
- Supplied with UPSKY™ BOX L/XL connector block

Design


- Small diameter cable
- Dielectric and non-polarized
- UV-resistant
- Waterproof

Installation

- Indoor and outdoor
- LSZH-FR

Environmentally friendly

- Eco-designed
- PEP Eco Passport
- Available upon request

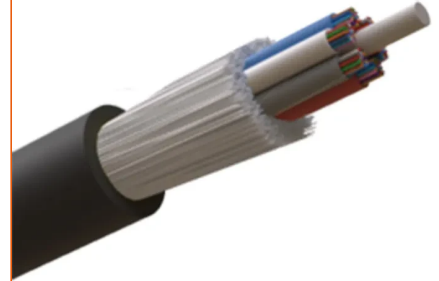

UPSKY™

UPSKY™ preterminated cable singlemode & multimode

EIGENSCHAFTEN

Konstruktionsmerkmale

Farbe	Schwarz
Außenmantel	LSZH-FR
Leitungsaufbau	Multitube with strenght member
Fibre optic type	SM G657 A2 or OM3
Additional strength member	Glass yarn

Abmessungsmerkmale

Nettogewicht ca.	85 kg/km
Kabeldurchmesser	8.9 mm

Mechanische Eigenschaften

Mechanische Festigkeit gegen Schläge	5N.m
Querdruckwiderstand (EN 187 000)	100daN/cm kg/cm
Maximum Pulling Tension	200daN (80 daN) kN

Anwendungsmerkmale

Mindestbiegeradius bei statischem Einsatz	178 mm
Lagertemperatur, Bereich	-40...70 °C
Art der Installation	Indoor/Outdoor
Umgebungstemperatur, Bereich	0...40 °C
Betriebstemperatur bewegte Anwendung	-40...70 °C

Product list

Aginode ref.	Country ref.	Name	Additional strength member	Farbe	Fibre optic type	Anzahl der optischen Fasern
13200648	-	UPSKY™ preterminated cable 72 LC (48MM + 24SM) / 80m	Glass yarn	Schwarz	SM G657 A2 or OM3	72
13200649	-	UPSKY™ preterminated cable 72 LC (48MM + 24SM) / 50m	Glass yarn	Schwarz	SM G657 A2 or OM3	72
13200650	-	UPSKY™ preterminated cable 24 LC (16MM + 8SM) / 100m	Glass yarn	Schwarz	SM G657 A2 or OM3	24

☎ = Make to order, 🏠 = In Stock

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.