Universeller Mini-Verteiler

LANMARK MINIVERTEILER FÜR 6 SNAP-IN BUCHSEN, WEISS



Aginode Ref: N521.606

- Einsetzbar als Consolidation Point.
- Kompatibel mit allen LANmark Snap-in Buchsen.
- 6 durchnummerierte snap-in Ports mit Staubschutz.
- Rückseitige Kabeldurchführung.
- Zugentlastung
- Erdungsmöglichkeit
- Verschiedene Montage Möglichkeiten

Anwendung

Entwickelt für den Einsatz als Consolidation Points, erhöht dieser Miniverteiler deutlich die Flexibilität in offenen Büroumgebungen, wie z.B. Großraumbüros, Schulungs- und Besprechungsräumen.

Produktmerkmale

Dieser Miniverteiler nimmt 6 LANmark Snap-in Buchsen auf; die Ports sind durchnummeriert.

Die Kabel werden von hinten in den Miniverteiler eingeführt und können zur sicheren Zugentlastung mittels Kabelbinder befestigt werden. Der Kabeleingang ist mit einem Staubschutz (Schaumstoff) versehen.

Die standardmäßige Farbe des Miniverteilers ist weiss. Eine schwarze Ausführung ist auf Anfrage erhältlich (Art.-Nr: N521.606BK)


Installation

Der Miniverteriler kann sehr flexibel und einfach an der Wand, im Unterflurbereich oder an der Decke befestigt werden.

Zur weiteren Ausstattung gehört eine Erdungsschraube und eine Schnellbefestung des Deckels mit der Verteilerbasis.

Dimensions 6 port ZD Box

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

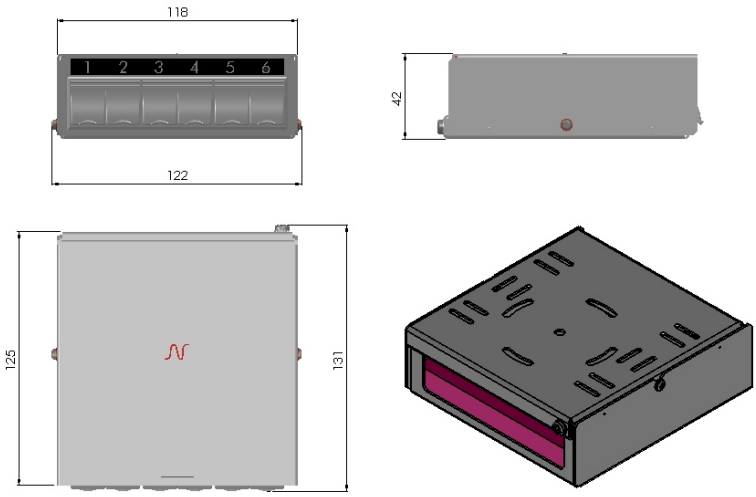

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

LANmark Miniverteiler für 6 Snap-In Buchsen, weiss

Eigenschaften

Konstruktionsmerkmale	
Farbe	White RAL 9002
Werkstoff	Steel
Abmessungsmerkmale	
Tiefe	125 mm
Höhe	42 mm
Breite	120 mm
Nettogewicht pro Stück	0.45 kg
Anwendungsmerkmale	
Einsatzbereich	Fixed installations
Anzahl der Ports	6

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.