

Cat.6 450 F/UTP LSZH Dca

AGINODE C6 450 F/UTP LSZH DCA 4P 200M RCH IVOIRY

Aginode Ref: 10272125

EAN: 3427630104347

- Complies to latest Cat 6 standard version
- Supports Class E applications
- Cable tested up to 450 MHz
- Flame retardant according to EN50575:2014+A1:2016 and IEC 60332-1
- Global screen for EMC performance
- Compatible POE, POE+ and UPOE
- RoHS EC Directive compliant
- Compliant with European Reach regulation
- N'Roll and MOBIWAY™ compatible

Application


F/UTP Category 6 cables are the standard offering from Aginode. Manufactured in accordance with ISO IEC 61156-5 requirements, the F/UTP cable is the best choice to support all Class E applications like Ethernet, Fast Ethernet, Gigabit Ethernet, ... Cat 6 F/UTP cables are suitable for basic voice and data installations up to 250 MHz. Aginode Cat.6 cables, combined with a similar class of performance connectivity, are suitable for voice and data installations according to ISO/IEC 11801, EN 50173 and TIA/EIA 568 standards.

Construction

1. Conductor: solid bare copper
2. Insulation : Polyethylen (EN 50290-2-23) - Two insulated conductors twisted to a pair
3. Cross filler - 4/2 laid up together
4. Tinned copper drain wire
5. Screen: ALU/PET foil - Alu inside
6. Outer Jacket : LSZH - Dca

Environment

Designed to reduce the environment impact, Aginode cables are compliant with RoHS 2011/65 Directive and European Reach 1907/2006/EC regulation. The outer sheath of the cable is made of halogen free material (IEC 60754-1 / EN 50267-2-1),

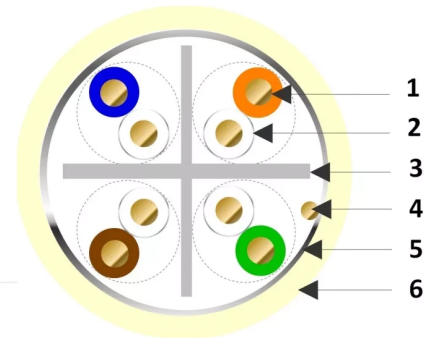

STANDARDS

EN 50173
EN 50288
EN 50575
IEC 60332-1
IEC 61156-5
ISO/IEC 11801

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

with limited fumes emission (IEC 61034-1/2 / EN 50268-1/2) and no acid gas emission in case of fire (IEC 60754-2 / EN 50267-2-2).

Aginode measure the environmental impact of each of the cable. Upon request the PEP Ecopassport or the Eco Material Declaration could be available.

Cat 6 450 F-UTP TRANSMISSION CHARACTERISTICS

CAT.6 450 F/UTP TRANSMISSION CHARACTERISTICS

Values at 20°C

| Frequency (MHz) | S/T | 4 | 10 | 16 | 20 | 100 | 200 | 250 | 350 | 450 |
|----------------------------|----------|------|------|------|------|------|------|------|------|------|
| Attenuation max. (dB/100m) | Standard | 3.8 | 6.0 | 7.6 | 8.5 | 19.9 | 29.1 | 33.0 | - | - |
| | Typical | 3.6 | 5.5 | 6.9 | 7.7 | 17.6 | 25.4 | 28.6 | 34.4 | 39.5 |
| NEXT min. (dB) | Standard | 66.3 | 60.3 | 57.2 | 55.8 | 45.3 | 40.8 | 39.3 | - | - |
| | Typical | 80.5 | 72.7 | 68.8 | 66.9 | 53.3 | 47.4 | 45.5 | 42.7 | 40.5 |
| PSNEXT min. (dB) | Standard | 63.3 | 57.3 | 54.2 | 52.8 | 42.3 | 37.8 | 36.3 | - | - |
| | Typical | 77.5 | 69.7 | 65.8 | 63.9 | 50.3 | 44.4 | 42.5 | 39.7 | 37.5 |
| ACRF min. (dB) | Standard | 56.0 | 48.0 | 43.9 | 42.0 | 28.0 | 22.0 | 20.0 | - | - |
| | Typical | 85.5 | 76.3 | 71.5 | 69.3 | 53.1 | 46.1 | 43.9 | 40.5 | 38.0 |
| PSACRF min. (dB) | Standard | 53.0 | 45.0 | 40.9 | 39.0 | 25.0 | 19.0 | 17.0 | - | - |
| | Typical | 82.5 | 73.3 | 68.5 | 66.3 | 50.1 | 43.1 | 40.9 | 37.5 | 35.0 |
| Return Loss min. (dB) | Standard | 23.0 | 25.0 | 25.0 | 25.0 | 20.1 | 18.0 | 17.3 | - | - |
| | Typical | 27.0 | 29.0 | 29.0 | 29.0 | 24.5 | 22.5 | 21.9 | 20.9 | 20.2 |

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

AGINODE C6 450 F/UTP LSZH Dca 4P 200m RCH IVOIRY

Eigenschaften

Konstruktionsmerkmale

| | |
|----------------------|--------------------------|
| Außenmantel | LSZH |
| Mantelfarbe | Ivory |
| Halogenfrei | Ja |
| Higher heating value | 821 MJ/km |
| Kabeltype | F/UTP |
| Gemeinsamer Schirm | Aluminium/polyester tape |

Abmessungsmerkmale

| | |
|-----------------------------|----------------|
| Nettogewicht ca. | 49 kg/km |
| Anzahl Paare | 4 |
| Abmessung (AWG) | 24 |
| Durchmesser über Isolierung | 1.13 mm |
| Außendurchmesser, nom. | 7.1 mm |
| Außenabmessungen | Not applicable |

Elektrische Eigenschaften

| | |
|--|-----------|
| Betriebskapazität | 50 nF/km |
| Max. Gleichstromwiderstand des Leiters bei 20° C | 95 Ohm/km |
| Characteristic impedance at 100 MHz | 100 Ohm |

Mechanische Eigenschaften

| | |
|---------------------------------------|------|
| Maximale Zugspannung bei Installation | 80 N |
|---------------------------------------|------|

Übertragungseigenschaften

| | |
|------------------------------|-------|
| Ausbreitungsgeschwindigkeit | 70 % |
| Kopplungsdämpfung bei 30 MHz | >50dB |

Anwendungsmerkmale

| | |
|----------------|---------------------|
| Einsatzbereich | Fixed installations |
| Kategorie | Cat. 6 |
| Flammwidrig | IEC 60332-1 |
| Rauchdichte | Ja |

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

| | |
|--|--------------|
| Verpackung | N'Roll 200 m |
| Umgebungstemperatur bei Verlegung, Bereich | 0...50 °C |
| Biegefaktor bei Verlegung | 8 (xD) |
| Biegefaktor nach Verlegung | 4 (xD) |
| Temperaturbereich bei fester Verlegung | -20...70 °C |

Erklärung zur Leistung

AGINODE C6 450 F/UTP LSZH Dca 4P 200m RCH IVOIRY pdf — 117.74 KB [Herunterladen](#) ↓