
Kabel mit verseilten Bündeladern

LOSE SCHLAUCHLEITUNG 12X12SM SP1451

Dieses Kabel wird für Zugangs-, Verteilungs-, Stadtnetz- und FTTx-Anwendungen verwendet und ist für die Verlegung durch Ziehen oder Einblasen in Leerrohre vorgesehen.



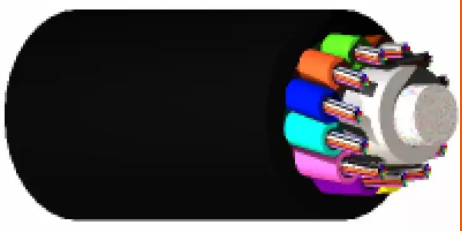

Eigenschaften und Anwendungen

- Hohe Einblasdistanz aufgrund der hervorragenden Reibungseigenschaften des Außenmantels
- Zentrale Festigkeitsträgerverstärkung
- Vollständig dielektrische Konstruktion
- Wasserdichte trockene Kernstruktur

Fasertyp

Das Kabel ist mit verschiedenen Fasertypen erhältlich.

Aufbau

- Geleegefüllte Schläuche mit farbigen Fasern
- Zentrales FRP-Festigkeitselement
- Außenmantel mit geringer Reibung

STANDARDS

EN 187000
IEC 60794

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Lose Schlauchleitung 12x12SM SP1451

Eigenschaften

Konstruktionsmerkmale	
Fasertyp	SM
Armierung	Aramid-Garn
Außenmantel	PE HD
Metallfrei	Yes
Zugentlastungselement	FRP
Leitungsaufbau	Loose Tube
Abmessungsmerkmale	
Anzahl der Bündel	12
Nettogewicht ca.	169 kg/km
Anzahl der optischen Fasern	144
Außendurchmesser, nom.	14.3 mm
Mechanische Eigenschaften	
Zulässige Zugbelastbarkeit	496 daN
Querdruckwiderstand (IEC 794-1-E3)	400 N/cm
Anwendungsmerkmale	
Betriebstemperatur	-30...70 °C
Lagertemperatur, Bereich	-40...70 °C
Art der Installation	Rohranlagen
Umgebungstemperatur bei Verlegung, Bereich	0...40 °C
Biegefaktor bei Verlegung	20 (xD)

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.