

Drop - Unibundle cables B2ca (1 - 12 fibres)

SC-CCA LSZH 1XSM G657A2 WT SP1802

Aginode Ref: 10512518

Unibundle cable with watertight glass yarns

This unibundle cable is designed for indoor/outdoor installation.

This cable has an outstanding fire behaviour.

This cable can be operated under a large temperature range.

Design

The SC-cca LSZH* SP1802 cable has a central bundle with 1 fibre inside. The design is reinforced by a layer of watertight glass yarns, aramid yarns and a LSZH* sheath.

Fibre type

The SC-B2 LSZH* SP1802 cable is available with singlemode and multimode fibres.

Technical performances


The unibundle cable performances are specified in the following tables.

Additional details

This cable is provided as a standard with a black sheath, other sheath colours are also available. Long exposure to UV with these others colours could generate colour fading.

Euroclass

B2ca s1 d0 a1

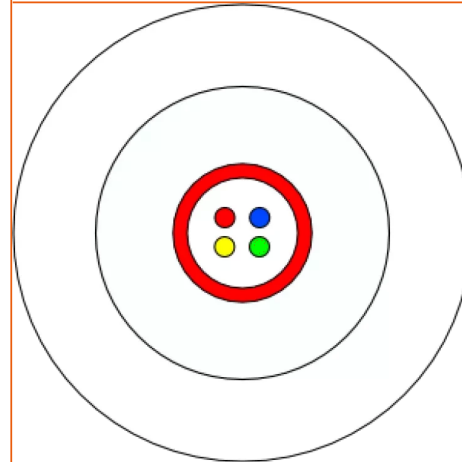

STANDARDS

EN 50399
IEC 60332-1
IEC 60332-3
IEC 60754-1
IEC 60794
IEC 61034
NF C32-070/C2

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

* LSZH: Low Smoke Zero Halogen.

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

SC-cca LSZH 1xSM G657A2 WT SP1802

Eigenschaften

Konstruktionsmerkmale

Farbe	weiss
Fasertyp	SM (G657.A2)
Außenmantel	LSZH
Halogenfrei	IEC 60754-1
Verwendetes Material für Längswasserdichtigkeit	Watertight glass yarns
Metallfrei	Yes
Leitungsaufbau	Unibundle
Additional strength member	Glass yarn

Abmessungsmerkmale

Nettogewicht ca.	21 kg/km
Anzahl der optischen Fasern	4
Durchmesser, Bereich	3.9...4.5 mm
Anzahl der optischen Fasern, Bereich	1...12
Außendurchmesser, nom.	3.9 mm

Mechanische Eigenschaften

Mechanische Festigkeit gegen Schläge	10 impacts of 3 N.m
Maximalzulässige Dauerzuglast	0.1 kN
Querdruckwiderstand (IEC 794-1-E3)	200 N/cm
Maximale Zugspannung bei Installation	400 N

Anwendungsmerkmale

Betriebstemperatur	-30...60 °C
flammwidrig	IEC 60332-3
Mindestbiegeradius bei statischem Einsatz	15 mm
Flammwidrig	IEC 60332-1
Rauchdichte	IEC 61034-2
UV Beständigkeit	Very good
Lagertemperatur, Bereich	-40...60 °C

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Biegeradius während Verlegung	15 mm
Art der Installation	Indoor/Outdoor
Umgebungstemperatur, Bereich	0...40 °C
Wasserdicht	Längs- und quer-

Erklärung zur Leistung

SC LSZH 4xSM G657A2 WT SP1802 pdf — 120.85 KB Herunterladen ↓

Verkauf & Lieferung Informationen

Standard Marking

Aginode - FIBRE OPTIC CABLE - SC-B2 LSZH B2ca s1 d0 a1 SP1249 - XXxYY - FB - TN - metric

XX = Fibre Count YY = Fibre Type FB = Frameries, Belgium (manufacturing place) TN = Traceability Number