

Duct - Microbundle cables

MICROBUNDLE RSM CABLE 1X12SM SP1849


This ruggedized cable is used for Access, Distribution, City Network and FTTx applications. It is designed to be quickly installed by pulling, blowing and in aerial network.

Characteristics & Applications

- Ruggedized cable design
- Easy installation with mid span access possibility
- Easy micro bundle stripability
- Glass yarns and radial strength members reinforcement
- All dielectric design
- Waterproof structure

Construction

- Jelly filled microbundles containing coloured fibres
- Radial FRP strength members
- Glass yarns reinforcement
- HDPE outer sheath

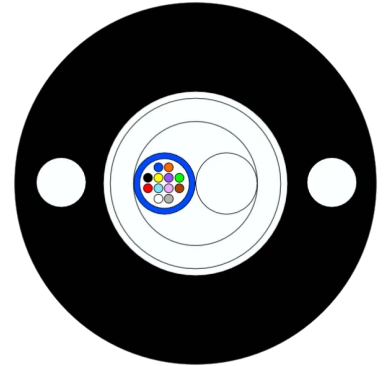

STANDARDS

EN 187000
IEC 60794

Microbundle RSM cable 1x12SM SP1849

Eigenschaften

Konstruktionsmerkmale

Fasertyp	SM
Armierung	Glasgarn
Außenmantel	PE HD
Mantelfarbe	Black - UV
Metallfrei	Yes
Zugentlastungselement	Embedded FRP
Leitungsaufbau	Multibundle

Abmessungsmerkmale

Anzahl der Bündel	1
Nettogewicht ca.	45 kg/km
Anzahl der optischen Fasern	12
Außendurchmesser, nom.	7.8 mm

Mechanische Eigenschaften

Zulässige Zugbelastbarkeit	108 daN
Querdruckwiderstand (IEC 794-1-E3)	250 N/cm

Anwendungsmerkmale

Betriebstemperatur	-30...70 °C
Lagertemperatur, Bereich	-40...70 °C
Art der Installation	Rohranlagen
Umgebungstemperatur bei Verlegung, Bereich	0...40 °C
Biegefaktor bei Verlegung	20 (xD)