


# Riser - Microbundle cables Cca

MB-CCA LSZH 24X6SM G657A2 SP1893

**Aginode Ref:** 10567581

Multi Micro-bundles cable - up to 144 fibres

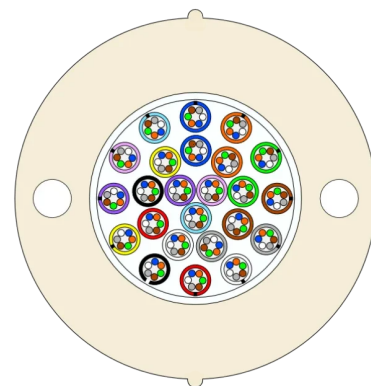

## STANDARDS

EN 50399  
IEC 60332-1  
IEC 60332-3  
IEC 60754-1  
IEC 60794  
IEC 61034

*All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.*

# MB-Cca LSZH 24x6SM G657A2 SP1893

## Eigenschaften

### Konstruktionsmerkmale

Farbe	Ivory
Fasertyp	SM (G657.A2)
Außenmantel	LSZH
Halogenfrei	IEC 60754-1
Metallfrei	Yes
Zugentlastungselement	Embedded FRP
Leitungsaufbau	Multibundle

### Abmessungsmerkmale

Anzahl der Bündel	24
Nettogewicht ca.	103 kg/km
Anzahl der optischen Fasern	144
Durchmesser, Bereich	... mm
Anzahl der optischen Fasern, Bereich	...
Außendurchmesser, nom.	12.2 mm

### Mechanische Eigenschaften

Mechanische Festigkeit gegen Schläge	10 impacts of 1 N.m
Maximalzulässige Dauerzuglast	0.2 kN
Querdruckwiderstand (IEC 794-1-E3)	150 N/cm
Maximale Zugspannung bei Installation	650 N

### Anwendungsmerkmale

Betriebstemperatur	-20...60 °C
Mindestbiegeradius bei statischem Einsatz	150 mm
Flammwidrig	IEC 60332-1
Rauchdichte	IEC 61034-2
Lagertemperatur, Bereich	-40...60 °C
Art der Installation	Indoor
Umgebungstemperatur, Bereich	0...40 °C

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

## Erklärung zur Leistung

MB-Cca LSZH 24x6SM G657A2 SP1893 pdf — 121.12 KB [Herunterladen](#) ↓

## Verkauf & Lieferung Informationen

## Standard Marking

Nexans - FIBRE OPTIC CABLE - MB-C LSZH Cca s1 d0 a1 SPXXXX - XXxYY - FB - TN - metric

XX = Fibre Count

YY = Fibre Type

FB = Frameries, Belgium (manufacturing place)