ADSS - Loose tube cables

AERIAL LOOSE TUBE CABLE 10X12SM SP1912

This cable is used for Access, Distribution, City Network and FTTx applications.It is designed to be installed on poles and can be also installed in duct..

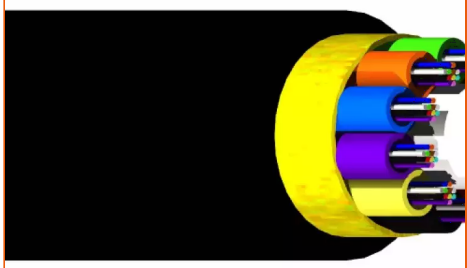

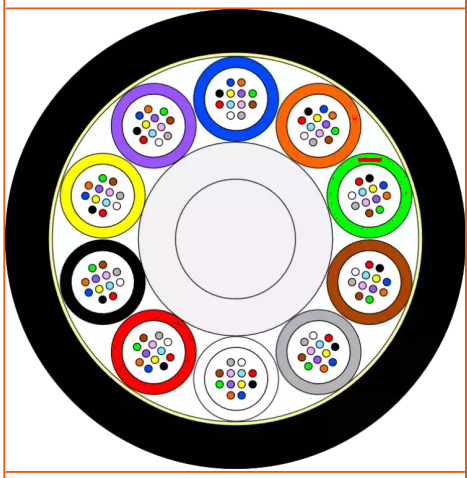

Characteristics & Applications

- Aramid yarns armoring
- Central strength member reinforcement
- All dielectric design
- Waterproof dry core structure
- Small size ADSS design to minimize the effect of ice and wind

Fibre Type

The cable is available with diffrent fibre types.

Construction

- Jelly filled tubes containing coloured fibres
- Central FRP strength member
- Aramid yarns armor
- HDPE outer sheath

Installation Table for Aerial

STANDARDS

EN 187000
IEC 60794

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Installation properties: SP1912 with 12 fibres per tube

The cable parameters are calculated according to the weather (summer and winter) defined below.
In different environmental conditions, please contact us to define the behavior of the cable

Weather conditions	Installation coefficient 0.9%	Summer	Winter
	Wind speed	105 km/h	0 km/h
	Dynamic pressure	520 N/m²	0 N/m²
	Ice load	0.00 kg/m	0.62 kg/m
	Ice type	-	Ice
	Ice thickness	0.0 mm	11.9 mm
	Operating temperature	15 °C	-5 °C
	Installation temperature	15 °C	15 °C

Cable behaviour	Span distance	Installation pulling force	Installation allowable sag	Maximum allowable sag	Max Operating force
	50 m	750N	0.45m	2.92	1800N
	70 m	1050N	0.63m	3.85	2290N
	90 m	1350N	0.81m	4.72	2750N
	110m	1650N	0.99m	5.55	3189N
	130m	1950N	1.17m	6.36	3613N

*** Ratio between the sag and the distance between two poles**

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Aerial Loose Tube Cable 10x12SM SP1912

Eigenschaften

Konstruktionsmerkmale	
Fasertyp	SM
Armierung	Aramid-Garn
Außenmantel	Anti-tracking
Metallfrei	Yes
Zugentlastungselement	FRP
Leitungsaufbau	Loose Tube
Abmessungsmerkmale	
Anzahl der Bündel	10
Nettogewicht ca.	108 kg/km
Anzahl der optischen Fasern	120
Außendurchmesser, nom.	11.8 mm
Mechanische Eigenschaften	
Maximale Zuglast bei Betrieb	370.0 daN
Zulässige Zugbelastbarkeit	500 daN
Querdruckwiderstand (IEC 794-1-E3)	300 N/cm
Anwendungsmerkmale	
Betriebstemperatur	-30...70 °C
Lagertemperatur, Bereich	-40...70 °C
Art der Installation	Aerial - self-supporting
Umgebungstemperatur bei Verlegung, Bereich	0...40 °C
Biegefaktor bei Verlegung	20 (xD)

Dokumentation

Deadends - Helical - ASFOTC 110-120 pdf — 791.15 KB Herunterladen

Suspensions - PSR 820 pdf — 879.11 KB Herunterladen

Verkauf & Lieferung Informationen

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Standard Marking

Aginode - MK - SPxxxx - FIBRE OPTIC CABLE - XX*YY - FB - TN - metric

XX = Fibre Count
YY = Fibre Type
FB = Produced in Frameries, Belgium
TN = Traceability Number

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.