

# ADSS - Loose tube cables

## AERIAL LOOSE TUBE CABLE 6X12SM SP1912

This cable is used for Access, Distribution, City Network and FTTx applications. It is designed to be installed on poles and can be also installed in duct..

## Characteristics & Applications

- Aramid yarns armoring
- Central strength member reinforcement
- All dielectric design
- Waterproof dry core structure
- Small size ADSS design to minimize the effect of ice and wind


## Fibre Type

The cable is available with different fibre types.

## Construction

- Jelly filled tubes containing coloured fibres
- Central FRP strength member
- Aramid yarns armor
- HDPE outer sheath

## Installation Table for Aerial

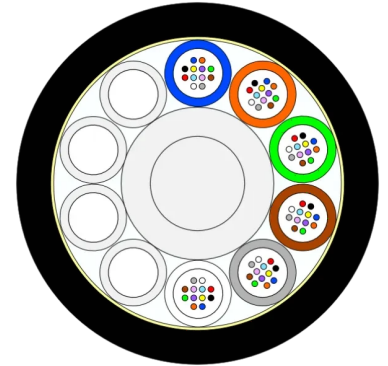

## STANDARDS

EN 187000  
IEC 60794

**Installation properties: SP1912 with 12 fibres per tube**

The cable parameters are calculated according to the weather (summer and winter) defined below. In different environmental conditions, please contact us to define the behavior of the cable

Installation coefficient 0.9%		Summer	Winter
Weather conditions	Wind speed	105 km/h	0 km/h
	Dynamic pressure	520 N/m <sup>2</sup>	0 N/m <sup>2</sup>
	Ice load	0.00 kg/m	0.62 kg/m
	Ice type	-	Ice
	Ice thickness	0.0 mm	11.9 mm
	Operating temperature	15 °C	-5 °C
	Installation temperature	15 °C	15 °C

Cable behaviour	Span distance	Installation pulling force	Installation allowable sag	Maximum allowable sag	Max Operating force
	50 m	750N	0.45m	2.92	1800N
	70 m	1050N	0.63m	3.85	2290N
	90 m	1350N	0.81m	4.72	2750N
	110m	1650N	0.99m	5.55	3189N
	130m	1950N	1.17m	6.36	3613N

\* Ratio between the sag and the distance between two poles

# Aerial Loose Tube Cable 6x12SM SP1912

## Eigenschaften

### Konstruktionsmerkmale

Fasertyp	SM
Armierung	Aramid-Garn
Außenmantel	Anti-tracking
Metallfrei	Yes
Zugentlastungselement	FRP
Leitungsaufbau	Loose Tube

### Abmessungsmerkmale

Anzahl der Bündel	10
Nettogewicht ca.	108 kg/km
Anzahl der optischen Fasern	72
Außendurchmesser, nom.	11.8 mm

### Mechanische Eigenschaften

Maximale Zuglast bei Betrieb	370.0 daN
Zulässige Zugbelastbarkeit	500 daN
Querdruckwiderstand (IEC 794-1-E3)	300 N/cm

### Anwendungsmerkmale

Betriebstemperatur	-30...70 °C
Lagertemperatur, Bereich	-40...70 °C
Art der Installation	Aerial - self-supporting
Umgebungstemperatur bei Verlegung, Bereich	0...40 °C
Biegefaktor bei Verlegung	20 (xD)