

# Aerial Metallic Self Supported ULW (12 - 48fibres)

ULW 3X12 SP1922 RR (PIA)

This cable is used for Access, Distribution, City Network and FTTx applications. It is designed for installation in the BT Fibre Network in Overhead and Underground environments.

The cable is design to respond to the British Telecommunications Specifications CW1842 and related specifications CW1500 part 2, 7 and 11.

Maximum spans 68m.

## Characteristics & Applications


- Metallic strength members
- Microbundles inside - easy to open without special tools
- Waterproof dry core structure
- Small size design to minimize the effect of ice and wind
- Fully compatible with the reference BT toolings for cable opening

## Fibre Type

Compliant with BT CW1505 Cat2 and ITU-T G657A1

## Construction

- Jelly filled microbundles containing coloured fibres
- Swellable yarns
- HDPE outer sheath with embedded metallic brass coated steel wires
- Colour : Black outer sheath with 2 yellow stripes at 180°

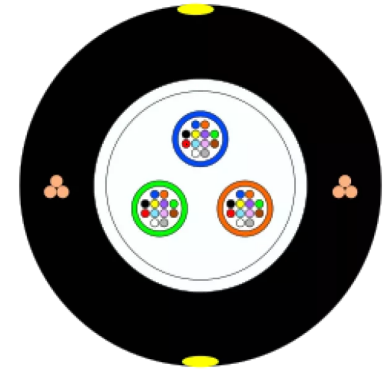

## STANDARDS

Customer specification  
IEC 60793  
IEC 60794

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

# ULW 3x12 SP1922 RR (PIA)

## Eigenschaften

### Konstruktionsmerkmale

Fasertyp	SM
Außenmantel	HDPE - UV / Anti-Rodent
Metallfrei	No
Zugentlastungselement	Steel rods
Leitungsaufbau	Multibundle

### Abmessungsmerkmale

Anzahl der Bündel	3
Nettogewicht ca.	34 kg/km
Anzahl der optischen Fasern	36
Außendurchmesser, nom.	7.0 mm

### Mechanische Eigenschaften

Zulässige Zugbelastbarkeit	65 daN
Schlagfestigkeit (EN 187 000)	10 J
Querdruckwiderstand (IEC 794-1-E3)	200 N/cm

### Anwendungsmerkmale

Nagetierschutz	ja
Betriebstemperatur	-20...70 °C
Lagertemperatur, Bereich	-40...70 °C
Art der Installation	Aerial - self-supporting
Umgebungstemperatur bei Verlegung, Bereich	0...40 °C
Biegefaktor bei Verlegung	20 (xD)

## Dokumentation

Tableau de charge aérien ULW\_3.xlsx xlsx — 12.17 KB [Herunterladen](#) ↓

## Verkauf & Lieferung Informationen

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

LASER <714> FB WWYY COF215 ULTRA LIGHT WEIGHT OH FIBRE CABLE XXF/21 PROPERTY OF BT - LASER- <714> N°OF - T hor - CCCCCM

*All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.*