

Railways - Multibundle K209B cables

MBC LSZH K209B 6X50/125 OM3 SP1344 BK

Aginode Ref: 10507006

Multi Micro-bundles cable with corrugated steel armour - 6 fibres 50x125 OM3

Multi Micro-bundles cable with corrugated steel armour:

SP1344 - up to 36 fibres modulo 6

SP1400 - up to 48 fibres modulo 6

SP1349 - up to 72 fibres modulo 12

SP1757 - up to 96 fibres modulo 12

SP1758 - up to 144 fibres modulo 12

SP1921 - up to 288 fibres modulo 12

This multi micro-bundles cable is designed for indoor/outdoor installation in railways infrastructure.

The corrugated steel armour provides a high rodent protection. This cable has an outstanding fire behaviour.

Access to μ bundles is made easy with the internal ripcord.

This cable can be operated under a large temperature range.

Design


The MBC LSZH* cable has a central strength member (FRP : Fibre Reinforced Plastic), with bundles (maximum 6 fibres per bundle) around. The design is reinforced by a first layer of watertight glass, a LSZH* inner sheath, a second layer of watertight glass yarns, a corrugated steel armour and a LSZH* outer sheath.

Fibre type

The MBC LSZH* cable is available with singlemode and multimode fibres.

Technical performances

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

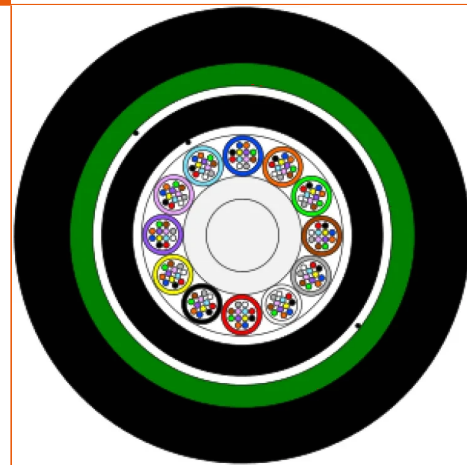

STANDARDS

EN 50399 B2
IEC 60331-2
IEC 60332-1
IEC 60332-3
IEC 60754-1
IEC 60794
IEC 61034
NF C32-070/C1

The multibundle cable performances are specified in the following tables.

Additional details

This cable is provided as a standard with a black sheath, other sheath colours are also available. Long exposure to UV with these other colours could generate colour fading.

The sheathing material is compliant with ISO 4892-2 regarding the UV exposure.

The cable is compliant with NFPA - IEEE1202 &UL1685.

Euroclass

B2ca S1a a1 d0

* LSZH: Low Smoke Zero Halogen.

MBC LSZH K209B 6x50/125 OM3 SP1344 BK

Eigenschaften

Konstruktionsmerkmale

Farbe	Schwarz
Fasertyp	OM3 50/125
Armierung	gewellter Stahl
Außenmantel	LSZH
Halogenfrei	IEC 60754-1
Verwendetes Material für Längswasserdichtigkeit	Quellfäden
Metallfrei	No
Zugentlastungselement	Central FRP
Leitungsaufbau	Multibundle
Additional strength member	Glass yarn

Abmessungsmerkmale

Anzahl der Bündel	1
Nettogewicht ca.	176 kg/km
Anzahl der optischen Fasern	6
Außendurchmesser, nom.	11.1 mm

Mechanische Eigenschaften

Mechanische Festigkeit gegen Schläge	10 impacts of 1 N.m
Maximalzulässige Dauerzuglast	1.4 kN
Querdruckwiderstand (IEC 794-1-E3)	300 N/cm
Maximale Zugspannung bei Installation	2000 N

Anwendungsmerkmale

Nagetierschutz	Corrugated steel tape
Betriebstemperatur	-20...60 °C
flammwidrig	IEC 60332-3
Mindestbiegeradius bei statischem Einsatz	220 mm
Flammwidrig	IEC 60332-1
Rauchdichte	IEC 61034-2
UV Beständigkeit	Good
Lagertemperatur, Bereich	-20...70 °C

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Biegeradius während Verlegung	275 mm
Art der Installation	Indoor/Outdoor
Umgebungstemperatur, Bereich	-20...60 °C
Wasserdicht	Längs- und quer-