

# LANmark-OF UCUN (Stahlpanzerung - Universal) Dca

LANMARK-OF UC UNIVERSAL 12X MULTIMODE 50/125 OM3 LSZH DCA BLACK

**Aginode Ref:** N165.UCUN12B


UC optical fibre cables

- Provides full rodent protection
- Corrugated steel tape armour for crush and rodent protection
- Central gel-filled with PBT construction
- All fibre grades
- Black LSZH UV-resistant outer sheath – CPR (Dca -s2, d2, a1) rated
- Suitable for indoor and outdoor applications

The UC optical fibre cable from Aginode is specifically designed for installations where mechanical resistance, multimode bandwidth performance, and environmental durability are critical. Its gel-filled central loose tube and corrugated steel armor provide robust protection in demanding indoor and outdoor conditions.

- **Armored Design:** Corrugated steel tape for excellent resistance to mechanical stress, crushing, and rodent attacks.
- **Loose Tube Construction:** Central PBT tube filled with thixotropic gel ensures long-term fibre stability.
- **Indoor & Outdoor Application**
- **High Performance OM3:** Optimized for high-speed multimode transmission over medium distances (50/125  $\mu\text{m}$ ).
- **Halogen-Free Flame Retardant Jacket:** Low emission of smoke and toxic gases; UV-resistant for extended durability.

The central tube contains up to 24 fibres, colour-coded for fast and reliable splicing.

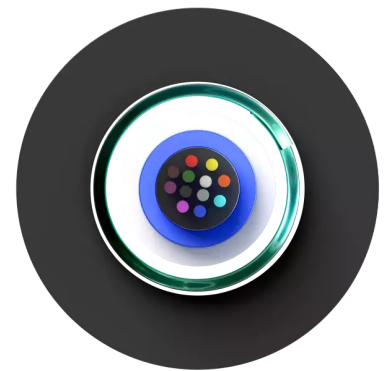

## STANDARDS

ISO/IEC 11801

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

# LANmark-OF UC Universal 12x Multimode 50/125 OM3 LSZH Dca Black

## Eigenschaften

### Konstruktionsmerkmale

Leitungsaufbau	Unitube
Fasertyp	OM3
Halogenfrei	IEC 60754-1
Jacket material	LSZH Halogen free flame retardant
Verwendetes Material für Längswasserdichtigkeit	Swellable Glass yarns

### Abmessungsmerkmale

Nettogewicht ca.	82 kg/km
Außendurchmesser, nom.	7.6 mm
Anzahl der optischen Fasern	12
Anzahl der Bündel	1
Rohrdurchmesser	2.8 mm

### Mechanische Eigenschaften

Crush resistance (IEC 60794-1-E3)	1500 N/100mm
Reißfestigkeit	1500 N

### Anwendungsmerkmale

Flammwidrig	IEC 60332-1-2
Korrosivität der (Brand-)Gase	niedrig, gem. IEC 60754-2
Umgebungstemperatur, Bereich	-30...60 °C
Dynamischer Mindestbiegeradius während Anwendung	152 mm
Mindestbiegeradius bei statischem Einsatz	114 mm
Betriebstemperatur	-40...70 °C
Rauchdichte	IEC 61034-2
Lagertemperatur, Bereich	-40...70 °C
UV Beständigkeit	Very good

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

## DoP: Declaration of Performance

DOP\_UCUN\_12XMM50 OM3\_Dca\_2.pdf pdf — 59.14 KB Herunterladen ↓

*All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.*