

LANmark Power-OF Box

LANMARK POWER-OF BOX

Aginode Ref: NFPB.4LD1M2.GE

The LANmark Power-OF Box is a compact enclosure designed for hybrid cable terminations, combining optical fiber data splicing and copper power distribution.

- **Optical fiber management**
- **Copper/Power distribution**

The LANmark Power & Data Solution Box is a versatile solution that integrates both data and power functionalities within a single enclosure.

It enables the termination of hybrid cables by separating the data and power sections while ensuring reliable performance.

- **Data section**
 - Optical fibre splicing capability
 - 1 LC Duplex through-adaptors for seamless connectivity
- **Power section**
 - 2 power mechanical fixing push-wires integrated for safe and efficient power distribution
 - Covers a maximum operating voltage of 48V.

The box is easy to handle, install, and integrate into constrained environments. It is particularly suitable for modern infrastructures that require simultaneous power delivery and high-speed data transmission.

Applications


- Hybrid cabling infrastructures
- Industrial and smart building projects
- Installations requiring both data and power in parallel
- Space-constrained environments



ISO/IEC 11801

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Product Overview

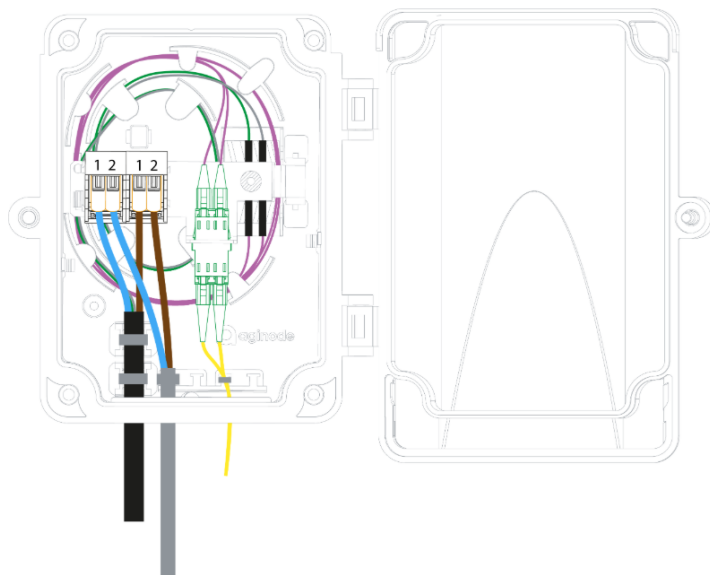

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

LANmark Power-OF Box

Eigenschaften

Konstruktionsmerkmale

Kabeleingang	von unten
Farbe	Light grey RAL 7035
Verbindertyp	LC Duplex
Werkstoff	Polycarbonate

Abmessungsmerkmale

Approximate weight	0.280 Kg
Tiefe	42 mm
Höhe	176 mm
Breite	142 mm

Elektrische Eigenschaften

Power Type Connector	Push - wire connector
----------------------	-----------------------

Anwendungsmerkmale

Flammwidrig	UL94 HB
Art der Installation	Indoor
Betriebstemperatur	-25...70 °C °C
UV Beständigkeit	Ja
Watertightness	IP 55



All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

PDF - 2.27 MB

LANmark Power-OFF Box notice

Herunterladen ↓

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.