LIGHTDROP

LIGHTDROP XS - TAP



Aginode specification

Aginode Ref: LDSFXS02HQHQHQ00NA01TCNANANA


Featuring:

- 1 Hardened Quarter Turn (FastConnect compatible) top TAP IN port.
- 2 Hardened Quarter Turn (FastConnect compatible) bottom ports for SPLITTER OUT and TAP OUT.
- Mounting bracket options.

Terminal max. attenuation*:

TAP ratio	TAP OUT	Splitter port
70% - 30%	2.10 dB	6.10 dB

*Total terminal attenuation, including insertion losses from pre-connectorization.

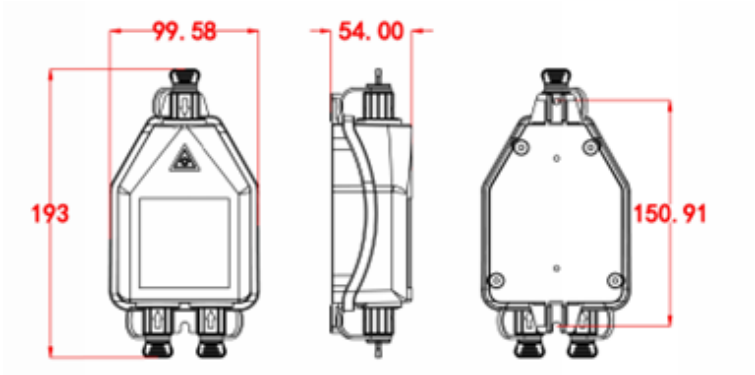

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

LIGHTDROP XS - TAP

Eigenschaften

Konstruktionsmerkmale	
Farbe	Schwarz
Werkstoff	PP
Mechanische Eigenschaften	
IK-Bewertung	8
Anwendungsmerkmale	
Art der Installation	Outdoor
Betriebstemperatur	-40...65 °C
Verpackung	Box
RoHS compliant	Yes
UV Beständigkeit	Ja
Watertightness	IP 68

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.