

LIGHTDROP

LIGHTDROP SPLICE 08

Aginode Ref: LDSFSP08HQNANA04SD00NASTNANANA


Featuring:

- 8 Hardened Quarter Turn (FastConnect compatible) bottom ports for branch connections.
- 48 fibres splicing capacity.
- 1 oval optical cable entry up to 18mm.
- 2 branch optical cable entries and up to 14mm.
- Integration of optical splitters (i.e. 4 splitters 1:2 or 2:2).
- Othre splice trays and optical splitter configurations available.
- Mounting bracket options for overlenght cable storage.

Terminal max. attenuation*:

Splitter ratio	Output
1:8	4.20 dB
2:8	4.50 dB

*Total terminal attenuation, including insertion losses from pre-connectorization.

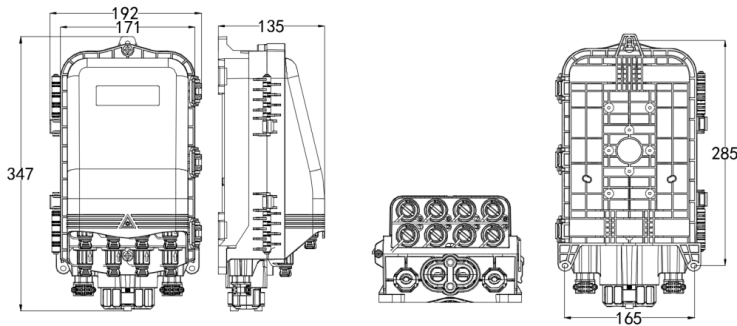

Aginode specification

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

LIGHTDROP SPLICE 08

Eigenschaften

Konstruktionsmerkmale

Farbe	Schwarz
Werkstoff	PP

Mechanische Eigenschaften

IK-Bewertung	8
--------------	---

Anwendungsmerkmale

Art der Installation	Outdoor
Betriebstemperatur	-40...65 °C
Verpackung	Box
RoHS compliant	Yes
UV Beständigkeit	Ja
Watertightness	IP 68