

# DCmark Rack Unit Solution Server DC

## DCMARK RACK UNIT SOLUTION SERVER DC 42U 600X1200

### **Aginode Ref:** NRCK.420612330-B

The DCmark RUS NRCK.420612330-B is a high-performance server rack engineered for optimal airflow thanks to his high perforation ratio at 80%. With the need of IA and GPU server more and more heavy, the DCmark rack metallic frame is designed to support high loading capacity :

- Loading capacity up to 1500kg to support heavy server
- Perforation ratio at 80% to offer a perfect air flow
- Single door for a better access
- optional : rear support for intelligent PDU and internal lateral cable tray


The NRCK.42061233-B, offer a height of 42U with a depth of 1200mm and width of 600mm

The DCmark RUS NRCK.420612330-B is a high-performance server rack engineered for optimal airflow thanks to his high perforation ration at 80%. With the need of IA and GPU server more and more heavy, the DCmark rack metallic frame is designed to support high loading capacity up to 1500kg.

Equipped with several features, DCmark Rack Unit Solution will ensure reliability, easy installation & easy maintenance for DC technician.

The single front door will offer a full access to the cabling in order to facilitate all technical intevention inside the rack. The doors are equipped with a 3 locking points system closing to ensure high security level. Smart handle with RFDI card can be also installed to avoid key management (optional)

The NRCK.42061233-B, offer a height of 42U with a depth of 1200mm and width of 600mm

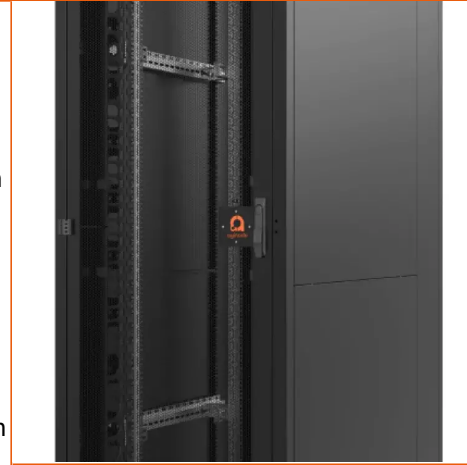

# DCmark Rack Unit Solution Server DC 42U 600x1200

## Eigenschaften

### Konstruktionsmerkmale

|                     |   |
|---------------------|---|
| Schaltschrankformat | 19"   |
| Kabeleingang        | From the top through brush panel and from bottom through sliding access |
| Cabling management  | Lateral front cable manager   |
| Farbe               | Schwarz   |
| Werkstoff           | Steel   |
| Gehäuseversion      | Server  |
| Type of front door  | double perforated at 80%  |
| Type of rear door   | double perforated at 80%  |

### Abmessungsmerkmale

|                   |              |
|-------------------|--------------|
| 19" mounting      | front & rear |
| Nettogewicht, ca. | 121 kg       |
| Tiefe             | 1200 mm      |
| Höhe              | 2017 mm      |
| Einheitshöhe      | 42 U         |
| Breite            | 600 mm       |

### Mechanische Eigenschaften

|              |    |
|--------------|----|
| IK-Bewertung | 07 |
|--------------|----|

### Anwendungsmerkmale

|                |   |
|----------------|---|
| Locking system | 3 locking points with mechanical handle |
| Verpackung     | carton                                  |