
Cordons de brassage Secure Lock LC LANmark-OF

- Variantes OS2 et OM3
- 8 couleurs d'embouts
- Longueurs disponibles : 1,2,3 et 5 m
- Système de verrouillage Secure Lock

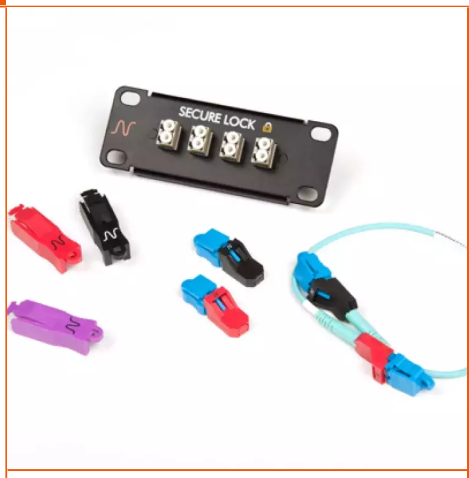

STANDARDS

ISO/IEC 24764

Les cordons Secure Lock LC sont conçus pour les applications où la sécurité est essentielle ou les applications pour lesquelles la déconnexion de cordons est déconseillée comme :

- Secteur militaire
- Éducation
- Santé
- Centres de données
- Vidéosurveillance

La gamme Secure Lock Aginode est compatible avec les adaptateurs standard LC, un avantage substantiel en comparaison avec les systèmes où un adaptateur spécifique est nécessaire.

8 couleurs d'embouts sont disponibles : noir, rouge, gris, bleu, vert, jaune, orange et blanc. div>

Les cordons avec un embout rouge et noir sont de stock. Les autres couleurs sont fabriquées sur commande.

Les cordons de 1, 2, 3 et 5 m sont en stock. D'autres longueurs sont disponibles sur commande, avec une quantité minimale et un délai de livraison.

Le set de produits Secure Lock LC comprend :

- Cordons–; Monomode OS2 (Jaune) and Multimode OM3 (Turquoise)
- Clés de couleur corespondant aux embouts verrouillables des cordons, ainsi qu'une clé violette "magique" débloquant les autres couleurs.
- Port locking plugs
- Une poignée d'extension pour les endroits difficiles à atteindre.
- Capots antipoussière

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Cordons de brassage Secure Lock LC LANmark-OF

CARACTÉRISTIQUES

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.