
LANmark-6A Cable GB 31247 B1

- Ideal cable for 10GBase-T application
- Full compliance to latest standards for Category 6A and Class EA
- Guaranteed performance up to 500MHz
- Global or individual pair shielding offering Alien Crosstalk immunity

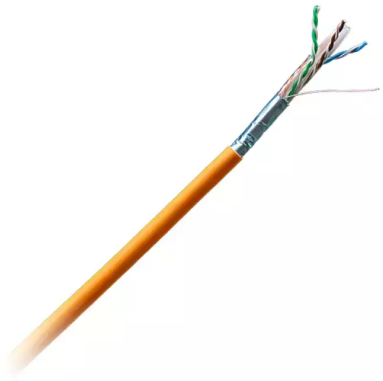

STANDARDS

ANSI/TIA-568-C.2
EN 50173-1
EN 50288-4-1
GB 31247
IEC 61156-5
ISO/IEC 11801

Application

LANmark-6A cables are the ideal solution for a 10G Ethernet network. The range has been designed specifically to support the higher frequencies required for 10 Gigabit Ethernet, while maintaining full backwards compatibility with today's needs. All LANmark-6A cables are shielded, in order to ensure immunity to Alien Crosstalk and other external interferences.

- 10Base-T Ethernet
- 100Base-TX Fast Ethernet
- 1000Base-TX Gigabit Ethernet
- 10GBase-T 10 Gigabit Ethernet IEEE 802.3
- 155 Mbit ATM
- 1.2 Gbit ATM
- future Cat 6A and Class EA applications

Performance

With guaranteed performance to 500MHz, Aginode LANmark-6A cables exceed the requirements of the International, European and American cable standards, including ISO/IEC 11801, IEC 61156-5, EN 50173, EN 50288 and TIA/EIA 568-C.2.

When used in combination with Aginode LANmark-6A Evo connectors and LANmark-6A Ultim patch cords, the system supports the 10GBase-T applications as defined in IEEE 802.3an and meets or exceeds the link and channel requirements for Category 6A and Class EA as defined in TIA/EIA 568-C.2 and ISO/IEC 11801.

The cables Jacket is Orange LSZH sheath. It has flame retardant properties compliant with IEC 60332-1 and also compliant with Chinese bundle flame test Class B1 according to GB 31247 B1.

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Installation

The LANmark-6A cables have the advantage of offering flexibility for installation and termination.

To support the correct set-up of hand held analysers for installation testing, the actual cable NVP value is given in the cable's print legend.

Guarantees

Traceability codes on both cable and packaging ensure quality validation of the installed cable.

Installations with LANmark-6A cable and connectivity are qualified for a 25 year full system warranty, which includes Parts, Channel Performance, Application Support and Labour, as described in the Aginode Certified System Warranty.

Electrical Performance LANmark-6A Cable (International)

Freq in MHz	Attn in dB		NEXT in dB		PSNEXT in dB		ACR-F in dB		PS ACR-F in dB		PS ANEXT in dB		PS AACR-F in dB		RL in dB	
	Max.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.
1	2,1	2,1	74,3	79,3	72,3	77,3	67,8	87,8	64,8	84,8	67,0	90,0	67,0	76,7	20,0	26,0
4	3,8	3,8	65,3	70,3	63,3	68,3	55,8	75,8	52,8	72,8	67,0	90,0	66,2	75,9	23,0	29,0
10	5,9	5,9	59,3	64,3	57,3	62,3	47,8	67,8	44,8	64,8	67,0	87,0	58,2	67,9	25,0	31,0
16	7,5	7,5	56,2	61,2	54,2	59,2	43,7	63,7	40,7	60,7	67,0	85,0	54,1	63,8	25,0	31,0
20	8,4	8,4	54,8	59,8	52,8	57,8	41,8	61,8	38,8	58,8	67,0	84,0	52,2	61,9	25,0	31,0
31,25	10,5	10,5	51,9	56,9	49,9	54,9	37,9	57,9	34,9	54,9	67,0	82,1	48,3	58,0	23,6	29,6
62,5	15,0	15,0	47,4	52,4	45,4	50,4	31,9	51,9	28,9	48,9	65,6	79,0	42,3	52,0	21,5	27,5
100	19,1	19,1	44,3	49,3	42,3	47,3	27,8	47,8	24,8	44,8	62,5	77,0	38,2	47,9	20,1	26,1
155	24,1	24,1	41,4	46,4	39,4	44,4	24,0	44,0	21,0	41,0	59,6	74,1	34,4	44,1	18,8	24,8
200	27,6	27,6	39,8	44,8	37,8	42,8	21,8	41,8	18,8	38,8	58,0	72,5	32,2	41,9	18,0	24,0
250	31,1	31,1	38,3	43,3	36,3	41,3	19,8	39,8	16,8	36,8	56,5	71,0	30,2	39,9	17,3	23,3
300	34,3	34,3	37,1	40,1	35,1	38,1	18,3	36,3	15,3	35,3	55,3	69,8	28,7	38,4	16,8	22,8
500	45,3	45,3	33,8	36,8	31,8	34,8	13,8	33,8	10,8	30,8	52,0	66,5	24,2	33,9	15,2	21,2

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

LANmark-6A Cable GB 31247 B1

CARACTÉRISTIQUES

Caractéristiques de construction

Gaine extérieure	Faible dégagement de fumée et sans halogène
Type de câble	U/UTP

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Product list

	Aginode ref.	Country ref.	Name	Gaine extérieure	Type de câble
	N100.638G-GB1	-	LANmark-6A U/UTP AWG23 Cat 6A LSZH GB 31247 B1 (d0,t0,a1) Orange 305m Plastic reel	Faible dégagement de fumée et sans halogène	U/UTP
	N100.672G-GB1	-	LANmark-6A F/UTP AWG23 Cat 6A LSZH GB 31247 B1 (d0,t0,a1) Orange 500m reel	Faible dégagement de fumée et sans halogène	F/UTP

= Make to order, = In Stock

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.