

LANmark-OF TB LSZH 48-96C - APAC Region

LANMARK-OF TIGHT BUFFER LSZH SM G.652.D 72C YELLOW

Aginode Ref: N174.043

Tight buffered optical fibre cables

- Indoor cable designed for backbone/horizontal installation
- All fibre grades
- Low Smoke Zero Halogene (LSZH)

Description and Application

Aginode LANmark-OF TB Indoor fibre cable is designed for indoor applications. The fibre cable has 900µm tight buffered fibres with flame sheath around the transmission medium, and the 900µm sheath provides additional protection for the fibres. The cable is coated with aramid yarns as the strength member, and the outermost layer is coated with LSZH jacket. Bend Insensitive OM3/OM4 and SingleMode G.652.D and G.657.A1 are available.


The fibre cable is of a dry structure suitable for horizontal or vertical installation. The fibre cable meets the needs of indoor fire protection and can be installed in ducts.

- Can be installed both vertically or horizontally
- Applicable as standard multimode and singlemode fibre
- Central FRP strength member
- Up to 8 sub tube, each contain 12c fibres
- LSZH Jacket
- Tight buffered fibre for easy stripping

Construction

Legend accompanying the cross section drawing for 48-96core OF cable:

1. 900µm Tight buffered fibre
2. Aramid yarn
3. Subunit jacket
4. Central FRP Strength member
5. LSZH jacket materials

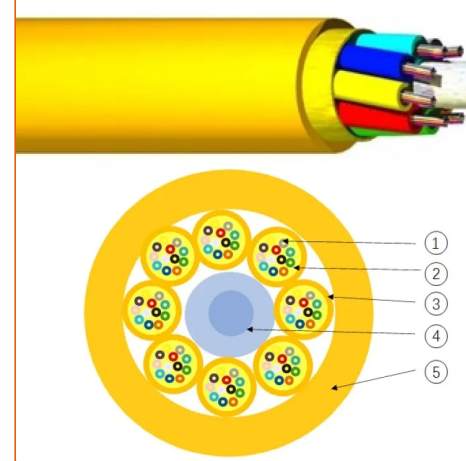

STANDARDS

- ANSI/TIA-568-C.3
- IEC 60332-1
- IEC 60332-3-24 Cat.C
- IEC 60793-2-10
- ISO/IEC 11801

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

LANmark-OF Tight Buffer LSZH SM G.652.D 72C YELLOW

Caractéristiques

Caractéristiques de construction

| | |
|-------------------------|-------------|
| Couleur | Jaune |
| Type de fibres optiques | SM (G.652D) |
| Porteur central | Central FRP |
| Number of tube layer 1 | 6 |

Caractéristiques dimensionnelles

| | |
|---------------------------|---------|
| Diamètre extérieur | 17.5 mm |
| Nombre de fibres optiques | 72 |

Caractéristiques mécaniques

| | |
|---|----------------------|
| Résistance mécanique aux chocs (IEC 60794-1-E4) | 100 impacts of 1 N.m |
| Crush resistance (IEC 60794-1-E3) | 1000 N/100mm |
| Maximum pulling force (IEC 60794-1-2-E1) | 1500 N |

Caractéristiques d'utilisation

| | |
|--|-------------|
| Température ambiante d'utilisation, plage | -20...60 °C |
| Rayon de courbure minimum en utilisation dynamique | 350.0 mm |
| Rayon de courbure minimum en utilisation statique | 175 mm |
| Température de stockage, plage | -30...70 °C |
| Température ambiante d'installation, plage | 0...40 °C |