

LANmark-OF UC Outdoor PE 2-24core APAC Region

LANMARK-OF UC PE 4CORE OM4 BLACK APAC REGION

Aginode Ref: N177.181

Suitable for in ducts or direct burial

- Corrugated steel tape armour
- Gel filled tube
- Available to multimode and singlemode fibre
- Provides rodent protection
- Outer Jacket is HDPE

Description and Application

Aginode LANmark-OF UC fibre cable is designed for outdoor applications. The construction is suitable for use outdoor for direct burial. It consists of a Unitube structure protected by corrugated steel tape armouring, the Unitube can hold up to 24C fibres. This provides rodent protection and high crush resistance. The cable has a HDPE outer jacket.


Construction

Legend accompanying the cross section drawing:

1. Optical fibres (250 um)
2. Waterproof gel filling
3. Loose tube
4. Glass Yarn
5. Corrugated steel tape armour
6. HDPE outer jacket with UV resistant additive

Characteristics

- Designed for termination by splicing
- Central loose tube design
- Corrugated steel protection
- Waterproof structure and UV-resistant
- Available in Multimode and Singlemode fibre
- Available from 2-24 fibres

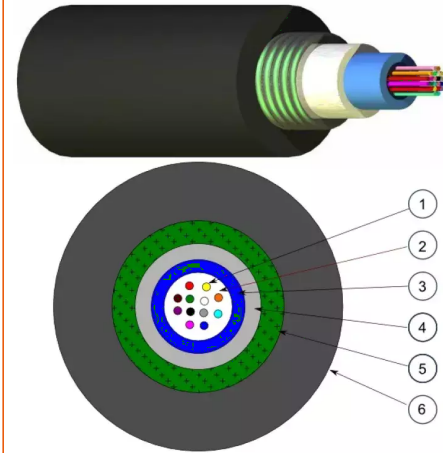

STANDARDS

ANSI/TIA-568-C.3
IEC 60793-2-10
ISO/IEC 11801

LANmark-OF UC PE 4core OM4 Black APAC Region

Caractéristiques

Caractéristiques de construction

Type de fibres optiques	OM4 50/125
Armure	Rubans d'acier galvanisé
Gaine extérieure	PE haute densité
Couleur de la gaine	Noir

Caractéristiques dimensionnelles

Diamètre extérieur	8.2 mm
Nombre de fibres optiques	4

Caractéristiques mécaniques

Résistance mécanique aux chocs (IEC 60794-1-E4)	100 impacts of 1 N.m
Maximum pulling force (IEC 60794-1-2-E1)	1300 N
Résistance à l'écrasement (IEC 794-1-E3)	300 N/cm

Caractéristiques d'utilisation

Température ambiante d'utilisation, plage	-20...60 °C
Rayon de courbure minimum en utilisation dynamique	164.0 mm
Rayon de courbure minimum en utilisation statique	82 mm
Température de stockage, plage	-30...60 °C
Température ambiante lors de l'installation, plage	0...40 °C