

Câble UPSKY™ bi-conducteur D-core avec sans tresse

D-CORE SANS TRESSE UPSKY™ 2X35MM² LSZH ECA 500M

Aginode Ref: 13200752

An Eca CPR compliant range for outdoor and indoor 4G/5G applications.

Power To The Antenna D-CORE is a unshielded dual conductor power cable. It can be used as a DC power cable for the interconnexion between Base Unit and Radio Units on mobile towers or rooftops. The D-shape of the isolated conductors enables to reduce the diameter and weight of these cables with no negative impact on the properties. It also has best-in-class flexibility.

Applications


- Power cable 0.6/1.0 kV
- For indoor/outdoor applications
- Used on mobile phone masts

Cable construction

1. **Bare conductor strand - Class 5**
2. **Insulation** (IEC 60811-1)XLPE
3. **Longitudinal ALU/PET tape**
4. **Outer sheath:** Eca
HFFR - Black

Environment

Designed to reduce the environment impact, Aginode cables are compliant with RoHS 2011/65 Directive and European Reach 1907/2006/EC regulation.

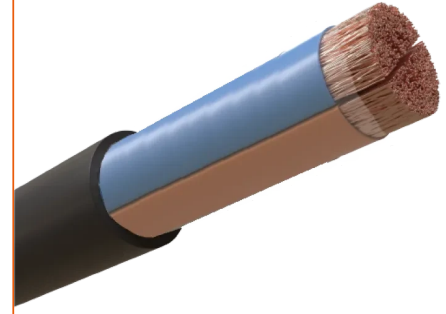

EN 50575 IEC 60228 IEC 60502-1 NF
C15-100

D-CORE sans tresse UPSKY™ 2x35mm² LSZH Eca 500m

Caractéristiques

Caractéristiques de construction

Cross section	2x35 mm ²
Gaine extérieure	LSZH Eca
Couleur de la gaine	Noir
Nature de l'âme	Bare copper class 5
Couleur d'isolation	Blue - brown

Caractéristiques dimensionnelles

Copper weight	566.60 kg/km
Nombre de conducteurs	2
Masse nette approximative	850 kg