


FLOORDROP

FLOORDROP TAP & SPLITTER

Aginode Ref: FDSFLA10SCNANA01SC01TCDCNANANANA

FLOORDROP TAP & Splitter is designed for effortless TAP deployment in MDU environments, whether installed inside the building or mounted on the façade. With its pre-integrated passive optical components, this version of FLOORDROP serves as one of the two essential building blocks in a standard TAP architecture. Inside each unit, two optical elements (a TAP and a splitter) are positioned for tool-free access, eliminating the need to open the enclosure or perform any splicing. The TAP chain can be extended either by activating each box using pre-connectorized jumpers directly on its 10 ports patch panel, or by connecting the optional pre-installed fiber tail.

It accommodates up to 10 SC/APC adapters. For improved accessibility, the adapters can be slightly tilted upward. The enclosure is suitable for both indoor and outdoor environments and complies with IP65 protection standards. Its port capacity makes it ideal for plug-and-play deployments, especially in TAP-based rollouts requiring fast and seamless installation. The demarcation between Access Network and Subscribers is made by means of 2 differentiated areas that can be secured independently.

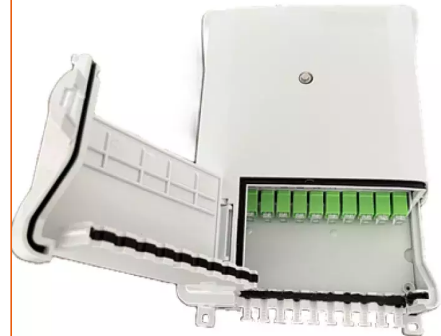

IEC 61753-1

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

FLOORDROP TAP & Splitter

Caractéristiques

Caractéristiques de construction

Type de fibres optiques	G.657 A2
-------------------------	----------

Caractéristiques dimensionnelles

Profondeur	50 mm
------------	-------

Hauteur (mm)	235 mm
--------------	--------

Largeur	125 mm
---------	--------

Caractéristiques mécaniques

Résistance aux chocs IK	9
-------------------------	---

Caractéristiques d'utilisation

Résistance au feu	UL 94 V0
-------------------	----------

Étanchéité	IP 65
------------	-------