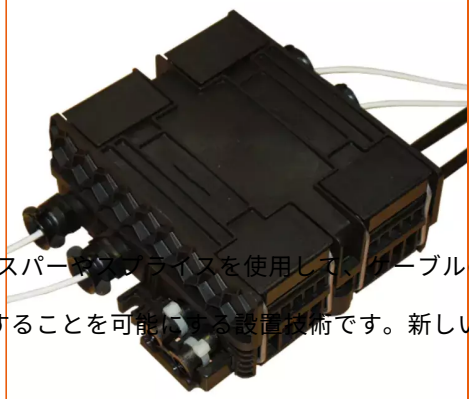
メカニカルシール / BLACKBOX 2L

- 3つのシール
- 複数の介入
- + タッピングや引き抜きよりも速い
- 超コンパクト
- 特許取得済み



FTTH展開の一環として、BLACKBOXボックスは接続ポイントとして使用されます。ストレートスパースプライスを使用して、ケーブル

ピケージとエクストラクションは、FTTxを主要幹線から順次導入し、必要に応じて建物に供給することを可能にする設置技術です。新しい
L未満）に対応します。

主な機能

ファイバーの保護

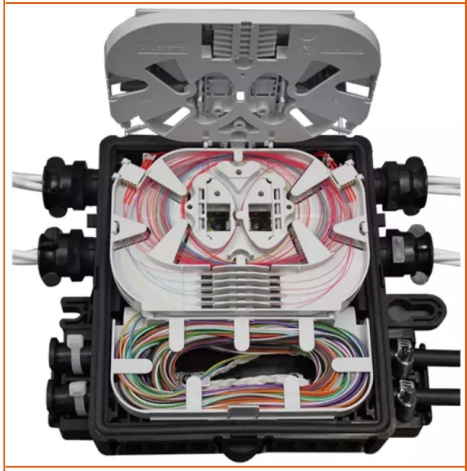
- 曲げ半径とファイバーの完全性を保証
- スプライスの保護（必要に応じて）

2/ （再）ケーブル保護

- メインケーブルの再保護
- メインケーブルと分岐ケーブルまたはアウトレットチューブをクランプする

3/ （再）シール

4/頻繁な開放（必要に応じて）



デザイン




ボックスは本体と4つのトグルでロックされるカバーで構成されています。メインケーブルはまず開閉可能なプレート上に準備され、ボデ
接続ケーブルは、機械的に密閉された4つのポートを通ってボックスから出ますが、各ポートには1本以上のケーブルを収納できます（シー

STANDARDS


Aginode specification

製品用途

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Piquage standard	Extraction	Extraction en U
		
Le câble est dénudé et lové dans le boitier. Une fibre est piquée et épissurée	Le câble est ouvert à deux endroits différents. Une fibre est coupée en un lieu et extraite à l'autre, pour être insérée dans un tube	Une boucle de câble est laissée en dehors du boitier, formant ainsi un « U ». Deux ouvertures de câble sont réalisées dans le même boitier pour permettre une extraction de fibre, qui peut ensuite être insérée dans un tube ou être épissurée

差別化されたシーリング

		
Le câble principal est installé par l'arrière du boitier. Une platine arrière amovible équipée d'un joint silicone vient réaliser l'étanchéité	Un couvercle, rendu étanche par un joint torique et des grenouillères, procure un large accès aux fibres, autant de fois que nécessaire	Enfin, les câbles ou les tubes dérivés, sortent du boitier au travers de 2x2 presse-étoupes, chacun pouvant recevoir plusieurs câbles en fonction de leur diamètre

シール範囲表

Code SAP	Nb câbles	Diamètre (mm)											
		3	4	5	6	7	8	9	10	11	12	13	14
10242172	4	■	■										
10260482	3		■	■	■								
10242170	4		■	■	■								
10242167	2				■	■							
10242164	1					■	■	■	■	■			
10242111	1									■	■	■	■

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

メカニカルシール / BLACKBOX 2L

CHARACTERISTICS

Construction characteristics	
Colour	Black
Material	Thermoplastic
Dimensional characteristics	
Height	80 mm
Width	195 mm
Length	202 mm
Number of cassettes	3
Splice number	36
Diameter main cable	4...15 mm
Diameter branch cable	4...6 mm
Mechanical characteristics	
IK Rating	9
Usage characteristics	
Operating temperature, range	-40...65 °C
Midspan	Yes
Number of ports	8
Minimum static operating bending radius	15 mm
U.V resistance	Yes
Packaging	Box
Installation type	Outdoor
RoHS compliant	Yes
Watertightness	IP 68

Resources

ドキュメンテーション

BLACKBOX 72OF for G657A2 fibre - instructions FR/EN pdf — 11.49 MB　ダウンロード

BLACKBOX 36OF for G657 - instructions (FR Only) pdf — 12.95 MB　ダウンロード

BLACKBOX 24OF for G652 fibre - instructions FR/EN pdf — 14.03 MB　ダウンロード

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Product list

	Aginode ref.	Country ref.	名前	Splice number	Midspan	Minimum static operating bending radius
	10276552	-	G657A1/A2ファイバー用BLACKBOX 36OF	36	Yes	15 (mm)
	10225796	-	BLACKBOX 72OF G657A2ファイバー用コイリングトレイ付き	72	Yes	7.5 (mm)
	10257104	-	BLACKBOX 24OF G652Dファイバー用コイリングプレート付	24	Yes	30 (mm)

= Make to order, = In Stock

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.