LANmark-OF UC 屋外用 LSZH 2～24コア アジア太平洋地域

- ダクト内や直埋設に適しています
- 波形鋼帯アーマー
- ゲル充填チューブ
- マルチモードおよびシングルモードファイバーに対応
- 齧歯類からの保護機能を備えています
- 外被は低煙・ハロゲンフリー（LSZH）仕様

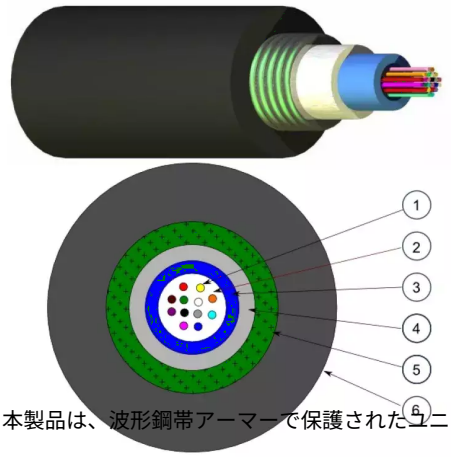

概要と用途

Aginode LANmark-OF
UC光ファイバーケーブルは、屋外用途向けに設計されています。その構造は、屋外での直埋設に適しています。本製品は、波形鋼帯アーマーで保護されたユニチ
本ケーブルはLSZH外被を備えています。

構造

断面図の凡例：

1. 光ファイバー（250 µm）
2. 防水ゲル充填材
3. ルーズチューブ
4. ガラスヤーン
5. 波形鋼帯アーマー
6. 耐紫外線添加剤を配合したLSZHアウタージャケット

STANDARDS

ANSI/TIA-568.3-D
IEC 60332-1
IEC 60332-3 Cat.C
IEC 60793-2-10
ISO/IEC 11801

特徴

- 難燃性（IEC 60332-1）および防火性（IEC 60332-3-24）
- スプライシングによる終端処理用に設計
- 中央ルーズチューブ構造
- 波形鋼製保護管
- 防水構造および耐紫外線性
- マルチモードおよびシングルモードファイバーで提供
- 2～24ファイバーのラインナップ

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

LANmark-OF UC 屋外用 LSZH 2～24コア アジア太平洋地域

CHARACTERISTICS

Construction characteristics	
Outer sheath	LSZH
Sheath colour	Black
Armour type	Corrugated steel
Mechanical characteristics	
Mechanical resistance to impacts (IEC 60794-1-E4)	100 impacts of 3N.m
Maximum pulling force (IEC 60794-1-2-E1)	1300 N
Crush resistance (IEC 60794-1-E3)	3000 N/100mm
Usage characteristics	
Storage temperature, range	-30...60 °C
Operating temperature, range	-20...60 °C
Minimum dynamic operating bending radius	186.0 mm
Minimum static operating bending radius	93 mm
Ambient installation temperature, range	0...40 °C

Resources

ドキュメント

LANmark-UC LSZH 24C APAC-Dimensional & Mechanical.xlsx xlsx — 9.32 KB　ダウンロード

N-number for LMOF UC LSZH-APAC_2-24.xlsx xlsx — 9.65 KB　ダウンロード

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Product list

	Aginode ref.	Country ref.	名前
	N179.470	-	LANmark-OF UC LSZH 2芯 OM5 ブラック
	N179.472	-	LANmark-OF UC LSZH 6芯 OM5 ブラック
	N175.481	-	LANmark-OF UC LSZH 24芯 OM3 ブラック
	N174.471	-	LANmark-OF UC LSZH 4芯 SM G.652.D ブラック
	N175.471	-	LANmark-OF UC LSZH 4芯 OM3 ブラック
	N175.475	-	LANmark-OF UC LSZH 12芯 OM3 ブラック
	N175.470	-	LANmark-OF UC LSZH 2芯 OM3 ブラック
	N174.481	-	LANmark-OF UC LSZH 24芯 SM G.652.D ブラック
	N179.481	-	LANmark-OF UC LSZH 24芯 OM5 ブラック
	N179.471	-	LANmark-OF UC LSZH 4芯 OM5 ブラック
	N179.473	-	LANmark-OF UC LSZH 8芯 OM5 ブラック
	N179.475	-	LANmark-OF UC LSZH 12芯 OM5 ブラック
	N177.471	-	LANmark-OF UC LSZH 4芯 OM4 ブラック
	N177.481	-	LANmark-OF UC LSZH 24芯 OM4 ブラック
	N174.470	-	LANmark-OF UC LSZH 2芯 SM G.652.D ブラック
	N177.470	-	LANmark-OF UC LSZH 2芯 OM4 ブラック
	N174.472	-	LANmark-OF UC LSZH 6芯 SM G.652.D ブラック
	N174.473	-	LANmark-OF UC LSZH 8芯 SM G.652.D ブラック
	N174.475	-	LANmark-OF UC LSZH 12芯 SM G.652.D ブラック
	N175.472	-	LANmark-OF UC LSZH 6芯 OM3 ブラック
	N175.473	-	LANmark-OF UC LSZH 8芯 OM3 ブラック
	N177.472	-	LANmark-OF UC LSZH 6芯 OM4 ブラック
	N177.473	-	LANmark-OF UC LSZH 8芯 OM4 ブラック
	N177.475	-	LANmark-OF UC LSZH 12芯 OM4 ブラック
	N17A.470	-	LANmark-OF UC LSZH 2芯単模 G.657.A1 黒色
	N17A.471	-	LANmark-OF UC LSZH 4芯 単模 G.657.A1 黒色

= Make to order, = In Stock

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.