

# Duct - Unitube cables

This unitube cable is used in the Access, Distribution, City Network and FTTx applications; it is designed to be easily installed in outdoor installations.

## Characteristics & Applications


- Easy installation due to the friction properties of the outer sheath
- Robust design
- Waterproof structure
- Halogen free

## Fibre type

The cable is available with different fibre types.

## Construction

- Jelly filled tube
- Reinforcement elements
- Low friction outer sheath



## STANDARDS

IEC 60794

# Duct - Unitube cables

## CHARACTERISTICS

### Construction characteristics

Fiber optic type	SM
Construction type	Unitube


### Dimensional characteristics

Number of tubes	1
Number of optical fibres	24

### Usage characteristics

Storage temperature, range	-40...70 °C
Installation type	Outdoor - Duct
Installation temperature, range	0...40 °C
Bending factor when laying	20 (xD)

## Resources

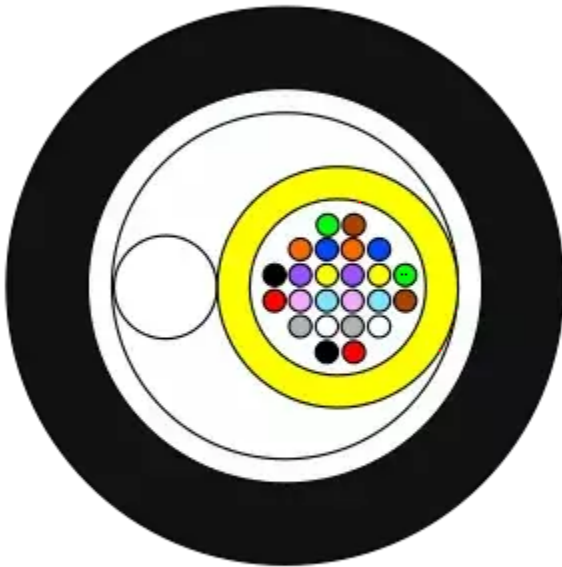

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

## 販売および配送情報

# Standard Marking

Aginode - FIBRE OPTIC CABLE - SPxxxx - XXxYY - FB - TN - metric

XX = Fibre Count



YY = Fibre Type



FB = Frameries, Belgium (manufacturing place)

TN = Traceability Number

*All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.*

## Product list

Aginode ref.	Country ref.	名前	Armour type	Fiber optic type	Number of optical fibres	Number of tubes
	-	Unitube Cable 1x24SM SP1647	Glass yarns	SM	24	1
 10231297	-	Unitube Cable 1x12SM SP1647	Glass yarns	SM (G.652D)	12	1

 = Make to order,  = In Stock

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.