

LANmark-OF ENSPACE Indoor MPO-MPO Pre-Term

- Factory terminated MPO-MPO fibre assembly
- Pre-Term cable with high CPR rating: Ccas1,d1,a1
- Small cable diameter reduces required data centre space
- Flexible fan-out for ease of installation in patch panel

MPO-MPO Pre-Term characteristics

The MPO-MPO Pre-Term has pinned (male) connectors. This matches with the un-pinned (female) connectors in the ENSPACE modules and the female Plug&Play modules.

The MPO-MPO Pre-Terms have PG-13 cable glands on both sides that provide a solid fixing in the LANmark-OF ENSPACE and Plug&Play patch panel slots.

The Pre-Terms are installed by laying. For longer lengths a detachable pulling eye can be used for installations by pulling.

The "xxx" in the N-number is the length in metre between the cable glands, i.e. the Pre-Term length between the rear of the patch panels.

In order to reduce overlengths in data centers the Pre-Terms are custom made and available with 1m increments.


Cable characteristics

The cable used for the Pre-Term is the "LANmark-OF Double Jacket Indoor Cable Cca" and is optimized indoor installations. The cable has an inner and outer jacket and 2 layers of Aramid yarns.

The double jacket makes the Pre-Term more robust between the racks.

Inside the panel the outer jacket is removed and the inner jacket allows for a flexible fan-out for installation inside the patch panel.

The cable has been tested for fire performance according to the new Construction Product Regulation: EN50575:2014

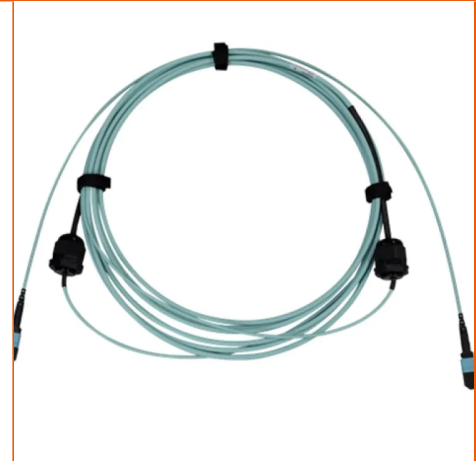

STANDARDS

ISO/IEC 11801

+A1:2016. It has a very high fire performance with minimal fire load and spread, smoke density, droplets and acidity: Cca-s1,d1,a1.

Polarity and optical performance

The Pre-Terms are available with a method B or C polarity according to standard TIA-568.3-D-2016.

For a duplex transmission like for 10GBase-SR (10G) the transmit-receive polarity in the channel is maintained with one of the following approaches:

1. Straight cassette on side A + Method C Pre-Term + straight cassette on side B.
2. Straight cassette on side A + Method B Pre-Term + crossed cassette on side B.

Both approaches use the same duplex LC patch cords on both sides.

For parallel optics for multimode like for 100GBase-SR4 (100G) method B Pre-Terms can be used with key up/key down adaptors on both sides of the channel. The same straight female-female patch cords can be used on both sides.

The insertion loss of a MPO-MPO connection is measured according to standard IEC61300-3-45.

The return loss of a MPO connection is measured according to IEC 61300-3-6.

LANmark-OF ENSPACE Indoor MPO-MPO Pre-Term

CHARACTERISTICS

Construction characteristics

Fiber optic type OM4 50/125

Wiring type Polarity Method B

Dimensional characteristics

Number of optical fibres 12

Usage characteristics

Ambient installation temperature, range 0...40 °C

Fire retardant IEC 60332-3

Flame retardant IEC 60332-1

Storage temperature, range -20...60 °C

Product list

Aginode ref.	Country ref.	名前
☎ N157.BI12AACxxx-VC	-	LANmark-OF ENSPACE屋内方法BのプレタームOM4 x12F MPO/M-MPO/M 超低損失ファンアウトC xm LSZH Ccaバイオレット
☎ N154.BI12AACxxx-VC	-	LANmark-OF ENSPACE Indoor Method B Pre-Term SM x12F MPO/M-MPO/M Low Loss fan out C xm LSZH Cca Yellow
☎ N157.CI12AACxxx-VC	-	LANmark-OF ENSPACE屋内方法CのプレタームOM4 x12F MPO/M-MPO/M 超低損失ファンアウトC xm LSZH Ccaバイオレット
☎ N154.CI12AACxxx-VC	-	LANmark-OF ENSPACE Indoor Method C Pre-Term SM x12F MPO/M-MPO/M Low Loss fan out C xm LSZH Cca Yellow
☎ N157.BI12FFPxxx-VC	-	LANmark-OF ENSPACE 屋内パッチコード OM4 x12F MTP/F-MTP/F 超低損失 xm LSZH Cca バイオレット
☎ N154.BI12FFPxxx-VC	-	LANmark-OF ENSPACE Indoor Patch Cord SM x12F MTP/F-MTP/F Low Loss xm LSZH Cca Yellow

☎ = Make to order, 📦 = In Stock