
essential-OF TB LSZH 2-24C - アジア太平洋地域

タイトバッファ光ファイバーケーブル

- バックボーン／水平配線用に設計された屋内用ケーブル
- OM3およびシングルモードG.652.Dに対応
- 外被は低煙・無ハロゲン（LSZH）仕様

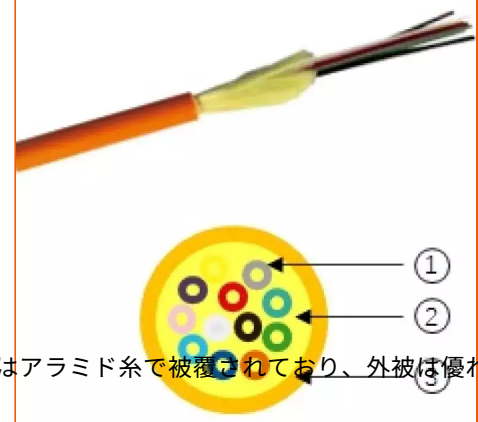

製品説明および用途

Essential-OF TB
屋内用光ファイバーケーブルは、屋内、特に建築物での使用を想定して設計されています。
本光ファイバーケーブルは、900µmのタイトバッファファイバーを採用しています。ケーブルはアラミド糸で被覆されており、外被は優れ
OF
TBは、曲げ耐性に優れたOM3およびシングルモードG.652.Dに対応しています。

本光ファイバーケーブルは、水平または垂直の敷設に適したドライ構造を採用しています。屋内防火要件を満たしており、ダクト内への敷

• 垂直・水平どちらの配線にも対応

•
標準的なマルチモードおよびシングルモード光ファイバーとして適用可能

• LSZHジャケット

• タイトバッファードファイバー

STANDARDS

ANSI/TIA-568-C.3
IEC 60332-1
IEC 60332-3-24 Cat.C
IEC 60793-2-10
ISO/IEC 11801

構造

2〜24芯OFケーブルの断面図に付随する凡例：

1. 900µm タイトバッファードファイバー
2. アラミド糸
3. LSZHジャケット材料

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

essential-OF TB LSZH 2-24C - アジア太平洋地域

CHARACTERISTICS

Construction characteristics	
Colour	Yellow
Fiber optic type	SM (G.652D)
Dimensional characteristics	
Number of optical fibres	12
Outer Diameter	6 mm
Mechanical characteristics	
Crush resistance (IEC 60794-1-E3)	1000 N/100mm
Maximum pulling force (IEC 60794-1-2-E1)	440 N
Mechanical resistance to impacts (IEC 60794-1-E4)	100 impacts of 1 N.m
Usage characteristics	
Installation temperature, range	0...40 °C
Minimum dynamic operating bending radius	120.0 mm
Minimum static operating bending radius	60 mm
Operating temperature, range	-20...60 °C
Storage temperature, range	-20...60 °C

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Product list

	Aginode ref.	Country ref.	名前
	N274.TBIN12Y	-	Essential-OF タイトバッファ LSZH SM G.652.D 12C イエロー
	N275.TBIN02O	-	Essential-OF タイトバッファ LSZH BI OM3 2C オレンジ
	N275.TBIN04O	-	Essential-OF タイトバッファ LSZH BI OM3 4C オレンジ
	N274.TBIN02Y	-	Essential-OF タイトバッファ LSZH SM G.652.D 2C イエロー
	N274.TBIN08Y	-	Essential-OF タイトバッファ LSZH SM G.652.D 8C イエロー
	N275.TBIN24O	-	Essential-OF タイトバッファ LSZH BI OM3 24C オレンジ
	N275.TBIN12O	-	Essential-OF タイトバッファ LSZH BI OM3 12C オレンジ
	N274.TBIN04Y	-	Essential-OF タイトバッファ LSZH SM G.652.D 4C イエロー
	N274.TBIN06Y	-	Essential-OF タイトバッファ LSZH SM G.652.D 6C イエロー
	N275.TBIN08O	-	Essential-OF タイトバッファ LSZH BI OM3 8C オレンジ
	N274.TBIN24Y	-	Essential-OF タイトバッファ LSZH SM G.652.D 24C イエロー
	N275.TBIN06O	-	Essential-OF タイトバッファ LSZH BI OM3 6C オレンジ

= Make to order, = In Stock

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.