
LANmark-OF UC 屋外用 LSZH 48～96コア アジア太平洋地域

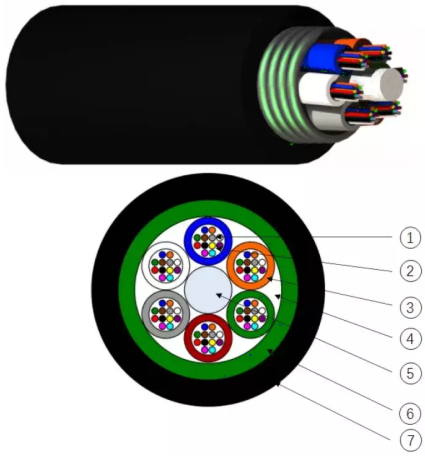

ダクト内や直埋設に適しています

- 波形鋼帯アーマー
- ゲル充填チューブ
- マルチモードおよびシングルモードファイバーに対応
- 齧歯類からの保護機能を備えています
- 外被は低煙・ハロゲンフリー（LSZH）仕様

概要と用途

Aginode LANmark-OF
UC光ファイバーケーブルは、屋外用途向けに設計されています。
その構造は、屋外での直埋設に適しています。中央強度部材を複数のチューブで囲み、波形鋼テープアーマーが機械的保護を提供します。各ルーズチューブには
これにより、齧歯類からの保護と高い耐圧性が確保されます。ケーブルの外被にはLSZHが採用されています。

構造

断面図の凡例：

1. 光ファイバー（250 µm）
2. 防水ゲル充填
3. ルーズチューブ
4. ガラスヤーン
5. 中心補強材
6. 波形鋼帯アーマー
7. 耐紫外線添加剤を配合したLSZH外被

特徴

- 難燃性（IEC 60332-1）および防火性（IEC 60332-3-24）
- スプライシングによる終端処理用に設計
- マルチプル・ルーズチューブ構造
- 波形鋼製保護管
- 防水構造および耐紫外線性
- マルチモードおよびシングルモードファイバーに対応
- 48/72/96ファイバーから選択可能

STANDARDS

ANSI/TIA-568-C.3
IEC 60332-1
IEC 60332-3 Cat.C
IEC 60793-2-10
ISO/IEC 11801

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

LANmark-OF UC 屋外用 LSZH 48～96コア アジア太平洋地域

CHARACTERISTICS

Construction characteristics	
Outer sheath	LSZH
Sheath colour	Black
Armour type	Galvanized steel tapes
Mechanical characteristics	
Mechanical resistance to impacts (IEC 60794-1-E4)	100 impacts of 1 N.m
Maximum pulling force (IEC 60794-1-2-E1)	1500 N
Crush resistance (IEC 60794-1-E3)	1000 N/100mm
Usage characteristics	
Storage temperature, range	-40...70 °C
Operating temperature, range	-40...70 °C
Minimum dynamic operating bending radius	216.0 mm
Minimum static operating bending radius	108 mm
Ambient installation temperature, range	0...40 °C

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Product list

	Aginode ref.	Country ref.	名前
	N175.493	-	LANmark-OF UC LSZH 48芯 OM3 ブラック
	N177.493	-	LANmark-OF UC LSZH 48芯 OM4 ブラック
	N174.493	-	LANmark-OF UC LSZH 48芯 SM G.652.D ブラック
	N177.505	-	LANmark-OF UC LSZH 72芯 OM4 ブラック
	N174.505	-	LANmark-OF UC LSZH 72芯 SM G.652.D ブラック
	N175.517	-	LANmark-OF UC LSZH 96芯 OM3 ブラック
	N177.517	-	LANmark-OF UC LSZH 96芯 OM4 ブラック
	N174.517	-	LANmark-OF UC LSZH 96芯 SM G.652.D ブラック
	N175.505	-	LANmark-OF UC LSZH 72芯 OM3 ブラック

= Make to order, = In Stock

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.