

# Pre-Connectorized Drop Cable (PCDC)

Aginode's fibre drop cable assembly solutions are crafted to enhance the speed and adaptability of network deployments. Each factory-connectorized cable removes the need for time-intensive field splicing. With a plug-and-play design, these solutions accelerate connections and service activation across the network.


## Pre-Connectorized Drop Cables - Name string key\*

Get in touch with us for detailed information on our full range of Pre-Connectorized Drop Cables. At Aginode, we offer a comprehensive portfolio and are eager to understand your cable preferences in order to better tailor our solutions to your needs.

Example (**Aginode ref.**):

PCDCIHS00050- -> Single jacket - ULW, PIA dielectric - 5,0mm 1FO, Hardened Standard, Stub, 50m

PCDC	Type of cable	End 1	End 2	Length (m)***
	B	HS	HS	xxxx
	I	HQ	HQ	
	G	HU	HU	
	L	SC	SC	
	D**	SX	SC	
	J	LC	LC	
	K	LX	LX	
	Y	PS	PS	
	Z	PL	PL	
	W		00 (Stub)	
	V			
	X			

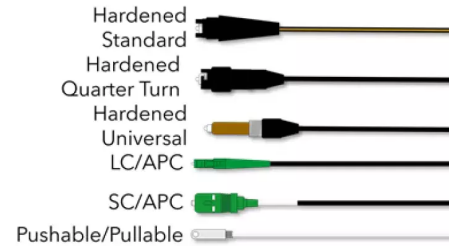

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

\* ADSS Cable Steel Helical Clamps are recommended

\*\* Maximum length of 40m aerial span recommended

\*\*\* - means round value, d means ,5 value

## Type of cable

Single jacket - ADSS, PIA - 3,0 mm 1FO	B
Single jacket - ULW, PIA dielectric - 5,0mm 1FO	I
Single jacket - ADSS - 4,5 mm 1FO	G
Figure 8 with messenger steel - Aerial - 5,2mmx2,0mm 1FO	L
Dual jacket - ADSS, Façade, Pulled in ducts - 5,1 mm 1FO	D
Dual jacket - Façade, Pulled in ducts - 4,5 mm BK 1FO	J
Dual jacket - Façade, Pulled in ducts - 4,5 mm GY 2FO	K
Indoor - B2ca 2,3mm 4FO	Y
Indoor - B2ca 2,3mm 1FO	Z
Indoor - B2ca 2,8mm 1FO	W
Indoor - B2ca 2,8mm 2FO	V
Indoor - Cca - 4,1mm 2FO	X

## Type of connector

Hardened Standard	HS	Fully compatible with Corning Optitap
Hardened Quarter Turn	HQ	Fully compatible with Huawei FastConnect
Hardened Universal	HU	Fully compatible with Optitap and FastConnect (by means of converters)
SC/APC	SC	

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

2x SC/APC (same end)	SX	Only multi-fibre cable
LC/APC	LC	
2x LC/APC (same end)	LX	Only multi-fibre cable
SC/APC Pushable*	PS	
LC/APC Pushable*	PL	
None (Stub)	00 (Stub)	

\* Connector Body Kit supplied separately to be installed in the field after cable installation

## Product list

Aginode ref.	Country ref.	名前
PCDCDxxxx - SP1892	-	Dual jacket - ADSS, Façade, Pulled in ducts - 5.1 mm 1FO
PCDCXxxxx - SP1249	-	Indoor - Cca Unibundle 2FO 4.1mm
PCDCLHQ00xxxx - SP2068	-	Figure 8 with messenger (steel wire) - ADSS 1FO - HQ
PCDCWxxxx - SP2067	-	Indoor (B2Ca) semi tight buffer
PCDCYxxxx - SP2066	-	Indoor (B2Ca) tube with 1...4 optical fibers
PCDCJxxxx - SP2069	-	Dual sheath outdoor (PE)/ Indoor (B2Ca) Black/Grey - Façade or aerial
PCDCBxxxx - SP1952	-	Single jacket - ADSS, PIA - 3.0 mm 1FO
PCDCIxxxx - SP2065	-	Aerial and duct cable 5.0mm - PIA

☎ = Make to order, 📦 = In Stock

*All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.*