B-LITE 3 - マイクロバンドルケーブル

このコンパクトなケーブルは、アクセス、ディストリビューション、シティネットワーク、FTTxアプリケーションに使用される。




特性と用途

- アウターシースの優れた摩擦特性による高いブローイング距離
- 柔軟性と剛性の適切なバランス
- 中間スパンへのアクセスが可能なため、設置が容易
- 容易なマイクロバンドルストリップ性
- 中央強度部材の補強
- 全誘電体設計
- 防水構造

構造

- 着色繊維入りゼリー充填マイクロバンドル
- 中央FRP強度部材
- 非常に低摩擦の外側シース

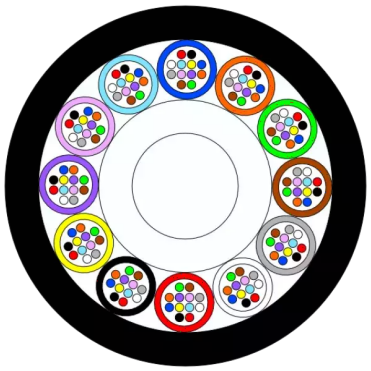

STANDARDS

EN 187000
IEC 60794

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

B-LITE 3 - マイクロバンドルケーブル

CHARACTERISTICS

Construction characteristics	
Colour	Black
Fiber optic type	SM
Outer sheath	PA
Metal free	Yes
Strength member	FRP
Construction type	Multibundle
Dimensional characteristics	
Number of tubes	12
Number of optical fibres	144
Nominal outer diameter (mm)	7.4 mm
Usage characteristics	
Operating temperature, range	-30...70 °C
Storage temperature, range	-40...70 °C
Installation type	Outdoor - Microduct blowable
Ambient installation temperature, range	0...40 °C
Bending factor when laying	20 (xD)

Resources

ドキュメンテーション

Leaflet - B-LITE3 Microcables pdf — 2.83 MB　ダウンロード

販売および配送情報

標準マーキング

Aginode - B-Lite^3 - SPxxxx - FIBRE OPTIC CABLE - XX*YY - FB - TN -メトリック

XX = ファイバ数
YY = ファイバータイプ
FB = ベルギー・フレーム社製
TN = トレーサビリティ番号

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Product list

	Aginode ref.	Country ref.	名前	Outer sheath	Fiber optic type	Nominal outer diameter (mm)	Number of optical fibres	Number of tubes
	Microcable 12x12SM SP1904 B-LITE^3	-	マイクロケーブル 12x12SM SP1904 B-LITE^3	PA	SM	7.4 (mm)	144	12
	SP1896	-	マイクロケーブル 6x12SM SP1896 B-LITE^3	PA	SM	4.7 (mm)	72	6
	Microcable 8x12SM SP1903 B-LITE^3	-	マイクロケーブル 8x12SM SP1903 B-LITE^3	PA	SM	5.7 (mm)	96	8
	SP1940	-	マイクロケーブル24x12SM SP1940 B-LITE^3	PA	SM	8.7 (mm)	288	24
	SP1902	-	マイクロケーブル 6x4SM SP1902 B-LITE^3	PA	SM	3.5 (mm)	24	6
	SP1896	-	マイクロケーブル 4x12SM SP1896 B-LITE^3	PA	SM	4.7 (mm)	48	4
	SP1956	-	マイクロケーブル 6x24SM SP1956 B-LITE^3	PA	G657A1 - 200 µm	5.2 (mm)	144	6
	10567921	-	マイクロケーブル 8x12SM SP1903 B-LITE^3	PA	SM	5.7 (mm)	96	8
	14500145	-	マイクロケーブル 12x12SM SP1904 B-LITE^3	PA	SM	7.4 (mm)	144	12
	10569678	-	マイクロケーブル 6x12SM SP1896 B-LITE^3	PA	SM	4.7 (mm)	72	6

= Make to order, = In Stock

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.