# LANmark Zone Distribution Boxes

**LANMARK ZD BOX 12 SNAP-IN WHITE**



**Aginode Ref:** N521.600

- For use as consolidation point
- Compatible with all LANmark Snap-In connectors
- 12 numbered Snap-In ports with shutters
- Pre-perforated openings for cable entry
- Cable fixing features
- Supplied with earthing screw
- Multiple mounting facilities

## Application

Designed for use as consolidation points, zone distribution boxes significantly improve the flexibility of desk locations in open office environments. They are particularly useful in offices where frequent relocation of outlets in the work area is required.

## Design

This ZD box has 12 numbered ports with shutters and can accomodate all LANmark Snap-In connectors.

The box provides cable entry both from the rear and from underneath and offers tie-wrap strain relief. It is supplied with a self-adhesive foam strip for protection against dust entry.

## Installation

The box is easy to install on walls, under raised floors or in ceiling voids, due to its multiple mounting features.

It is equipped with an earthing point and with fasteners to fix the lid to the base.

### Mounting dimensions 12 port ZD Box

*All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.*

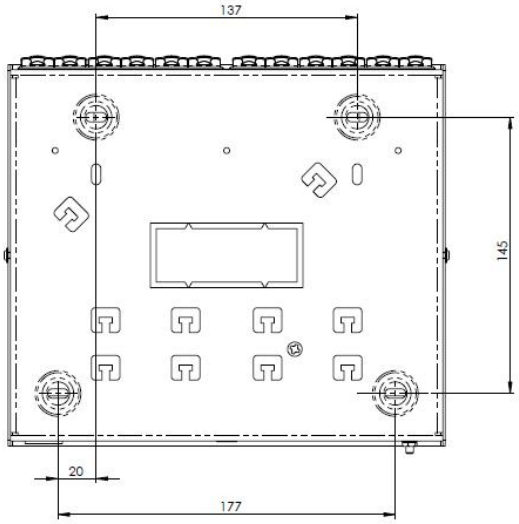


*All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.*

# LANmark ZD box 12 Snap-In White

## Characteristics

| | |
|---|---|
| **Construction characteristics** | |
| Colour | White RAL 9002 |
| Material | Steel |
| **Dimensional characteristics** | |
| Depth | 200 mm |
| Height | 45 mm |
| Width | 230 mm |
| Approximate weight per piece | 1.25 kg |
| **Usage characteristics** | |
| Field of application | Fixed installations |
| Number of ports | 12 |

*All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.*