


LANsense Fibre Patch Cords

LC DUPLEX LANSense PATCH CORD - OM3

Aginode Ref: N884.5LLP3

- Additional copper pin for port detection
- High bandwidth OM3 fibre
- Available with LC connectors

The LC LANSense patch cord uses the standard LC duplex connector, enabling high-density fiber connections to be achieved. The LC LANSense cord, however, has an over-boot to incorporate the sensing capability of the LANSense products. The LANSense patch cords are available in both high bandwidth OM4 and single-mode OS2 fibre types and so offer a comprehensive range of patch cords for interfacing with the latest network equipment.

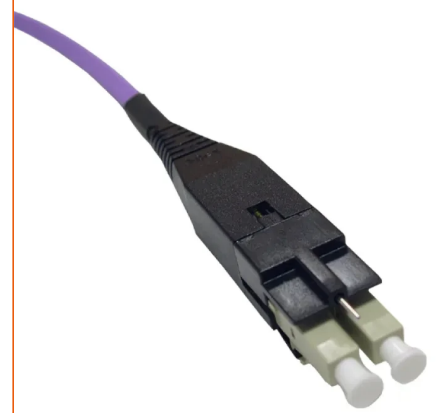

STANDARDS

ISO/IEC 11801

LC Duplex LANsense Patch Cord - OM3

Characteristics

Construction characteristics

| | |
|------------------|------------|
| Colour | Purple |
| Fiber optic type | OM3 50/125 |
| Connector type | LC |

Usage characteristics

| | |
|--------------------|-----------|
| Length | 3 m |
| Component function | Patchcord |

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.