# LANmark Zone Distribution Boxes

**LANMARK ZD BOX 6 SNAP-IN WHITE**




**Aginode Ref:** N521.606

- For use as consolidation point.
- Compatible with all LANmark snap-in connectors.
- 6 numbered snap-in ports with shutters.
- Cable entry from the back.
- Cable fixing features
- Supplied with earthing screw
- Multiple mounting facilities

## Application

Designed for use as consolidation points, zone distribution boxes significantly improve the flexibility of desk locations in open office environments. They are particularly useful in offices where frequent relocation of outlets in the work area is required.

## Design

This ZD box has 6 numbered ports with shutters and can accomodate all LANmark snap-in connectors.

The box provides cable entry from the back and offers tie-wrap strain relief. It is supplied with a self-adhesive foam strip for protection against dust entry.

The ZD box is supplied as standard in white. A black version is available on request.


## Installation

The box is easy to install on walls, under raised floors or in ceiling voids, due to its multiple mounting features, including standard European 45 x 45 mm grid dimensions.

It is equipped with an earthing point and with fasteners to fix the lid to the base.

### Dimensions 6 port ZD Box

*All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.*

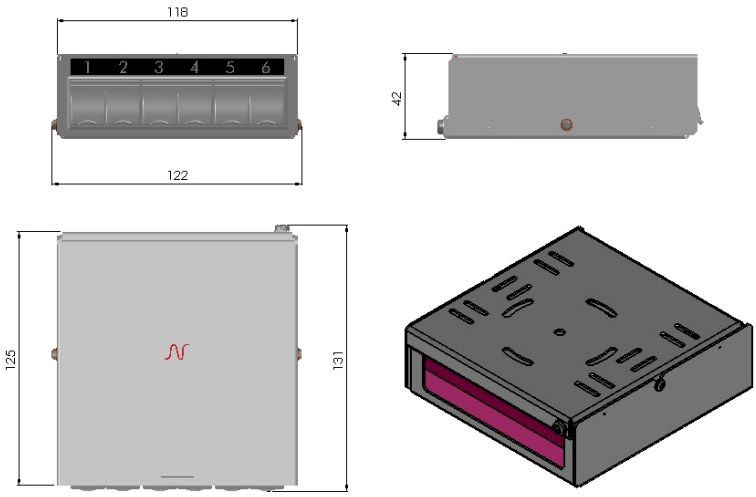


*All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.*

# LANmark ZD box 6 Snap-In White

## Characteristics

| | |
|---|---|
| **Construction characteristics** | |
| Colour | White RAL 9002 |
| Material | Steel |
| **Dimensional characteristics** | |
| Depth | 125 mm |
| Height | 42 mm |
| Width | 120 mm |
| Approximate weight per piece | 0.45 kg |
| **Usage characteristics** | |
| Field of application | Fixed installations |
| Number of ports | 6 |

*All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.*