LANmark-OF Slimflex パッチコード（シングルモード）

LANMARK-OF SLIMFLEX シンプレックス パッチコード LC/UPC-LC/UPC SM LSZH XM イエロー



Aginode Ref: N122S.4LLYX

- 光ファイバーパッチコード
- LANmark-OF シングルモードの性能
- GIGAliteFLEX 曲げ耐性ファイバー
- キャビネットや作業現場での使用向け

保証および設置

Aginode LANmark-OF
光ファイバーパッチコードは、高速プロトコルに対応した屋内用途向けに設計されています。

代表的な設置環境は以下の通りです：

- パッチパネルとアクティブ機器を接続するためのキャビネット。
- データセンター内のクロスコネクト。
- ワークエリアにおいて、ワークステーションを壁面コンセントに接続する用途（Fibre To The Desk）に適しています。

STANDARDS

ISO/IEC 11801

特性


- IEC 61300-3-4 に基づく最大挿入損失：0.25 dB
- 標準挿入損失：0.1 dB
- IEC 61300-3-6 に基づく LC/UPC の最小反射損失：50 dB
- IEC 61300-3-6 に基づく LC/APC の最小反射損失：65 dB
- 19 mmの短いコネクタブーツ
- 最小曲げ半径：10 mm
- コネクタの近くにトレーサビリティラベルが貼付されています

ファイバーの種類

LANmark-OF SM パッチコードには、LANmark-OF SM
GIGAliteFLEX
ファイバーが使用されています。これらのファイバーは曲げに強く、ITU-T G.657.A1 および IEC 60793-2-50（ファイバーモデル B6.a1）に準拠しています。
シングルモード・ピグテールのジャケットは黄色です。

回路図 極性付きパッチコード

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

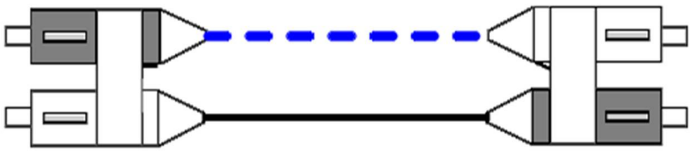

Cross-over patch cord (A1 to B2 & B1 to A2)

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

LANmark-OF Slimflex シンプレックス パッチコード LC/UPC-LC/UPC SM LSZH Xm イエロー

Characteristics

Construction characteristics	
Fiber optic type	SingleMode 9/125
Outer sheath	LSZH-FR
Connector type	LC
Armour type	Aramid yarn
Colour	Yellow
Dimensional characteristics	
Width	2 mm
Nominal inner diameter	2.0 mm
Height	2 mm
Mechanical characteristics	
Maximum pulling force (IEC 60794-1-2-E1)	200 N
Crush resistance (IEC 60794-1-E3)	100 N/cm
Transmission characteristics	
Insertion Loss, maximum, dB	0.25 dB
Return Loss, Minimum, dB	50 dB
Usage characteristics	
Operating temperature, range	-10...50 °C
Minimum static operating bending radius	10 mm
Flame retardant	IEC 60332-1

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.