

# ダクト - ルーズ・チューブ・ケーブル

## LOOSE TUBE ARMORED CABLE 8X12SM SP1504

**Aginode Ref:** Loose Tube Armored Cable 8x12SM SP1504

This cable is used for Access, Distribution, City Network and FTTx applications. It is designed to be installed by pulling or blowing in ducts.

## Characteristics & Applications


- High blowing distance due to the excellent friction properties of the outer sheath
- Central strength member reinforcement
- High pulling strength
- All dielectric design
- Waterproof dry core structure

## Fibre Type

The cable is available with different fibre types.

## Construction

- Jelly filled tubes containing coloured fibres
- Central FRP strength member
- Glass yarns armoring
- Very Low friction outer sheath

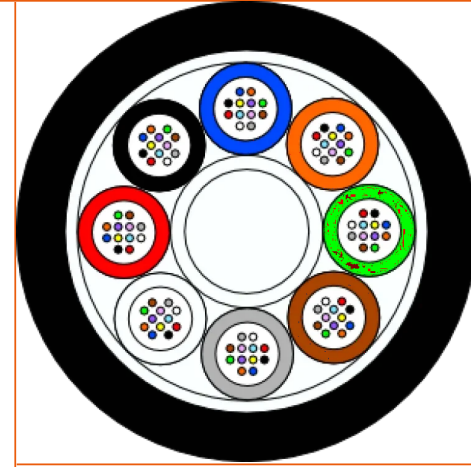

## STANDARDS

EN 187000  
IEC 60794

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

# Loose Tube Armored Cable 8x12SM SP1504

## Characteristics

### Construction characteristics

Armour type	Glass yarns
Outer sheath	HDPE
Strength member	FRP
Metal free	Yes
Construction type	Loose Tube
Fiber optic type	SM

### Dimensional characteristics

Nominal outer diameter (mm)	11.4 mm
Approximate weight	114 kg/km
Number of optical fibres	96
Number of tubes	8

### Mechanical characteristics

Maximum admissible traction load (Tm)	800 daN
Crush resistance (IEC 60794-1-E3)	300 N/cm

### Usage characteristics

Bending factor when laying	20 (xD)
Operating temperature, range	-30...70 °C
Ambient installation temperature, range	0...40 °C
Storage temperature, range	-40...70 °C
Installation type	Outdoor - Duct