

# Duct - Microbundle cables

## MICROBUNDLE RSM CABLE 4X8SM SP1868


This ruggedized cable is used for Access, Distribution, City Network and FTTx applications. It is designed to be quickly installed by pulling, blowing and on aerial

## Characteristics & Applications

- Ruggedized cable design
- Easy installation with mid span access possibility
- Easy micro bundle stripability
- Glass yarns and radial strength members reinforcement
- All dielectric design
- Waterproof structure

## Construction

- Jelly filled microbundles containing coloured fibres
- Radial FRP strength members
- Glass yarns reinforcement
- Water swellable tape
- HDPE outer sheath

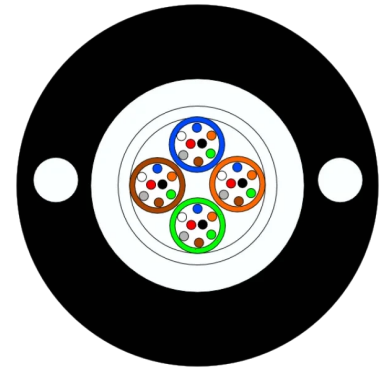

## STANDARDS

EN 187000  
IEC 60794

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

# Microbundle RSM cable 4x8SM SP1868

## Characteristics

### Construction characteristics

|                   |              |
|-------------------|--------------|
| Fiber optic type  | SM           |
| Armour type       | Glass yarns  |
| Outer sheath      | HDPE         |
| Sheath colour     | Black - UV   |
| Metal free        | Yes          |
| Strength member   | Embedded FRP |
| Construction type | Multibundle  |

### Dimensional characteristics

|                             |          |
|-----------------------------|----------|
| Number of tubes             | 4        |
| Approximate weight          | 60 kg/km |
| Number of optical fibres    | 32       |
| Nominal outer diameter (mm) | 8.6 mm   |

### Mechanical characteristics

|                                       |          |
|---------------------------------------|----------|
| Maximum admissible traction load (Tm) | 188 daN  |
| Crush resistance (IEC 60794-1-E3)     | 250 N/cm |

### Usage characteristics

|   |             |
|---|-------------|
| Operating temperature, range            | -30...70 °C |
| Storage temperature, range              | -40...70 °C |
| Ambient installation temperature, range | 0...40 °C   |
| Bending factor when laying              | 20 (xD)     |

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.