ウォールドロップ V2


ウォールドロップV2 12OF

Aginode Ref: 10225037

WALLDROPは12 OFのスプライスカセット1個を装備

タイトネスキット

- 分配ケーブル用6〜12mm
- ドロップケーブル用3〜5mm

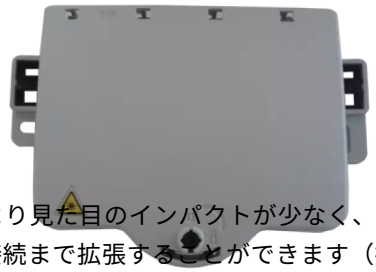

WALLDROPボックスは、光ケーブルの配線を可能にするために設計されています。そのデザインにより見た目のインパクトが少なく、最大
標準仕様として12接続用のスプライスカセットを装備しており、接続を中断することなく現場で36接続まで拡張することができます（拡張
ドロップ・ケーブル・エントリーには、3〜7mm（3〜5mmと5〜7mmをシールする2タイプ）の開口部に対応するシーリング・プラグ付
オーガナイザートレイは、メインケーブルと加入者接続部から取り出されたファイバーまたはマイクロモジュールのための個別の巻取りソ
スプライスカセットには1x4ベアファイバースプリッター用のスロットがあります。
WALLDROPボックスは、設置場所に応じて水平にも垂直にも取り付けることができます。また、ケーブルに直接吊り下げて設置することも
製品には、設置に必要なすべての付属品（コーム、カセット、シール、プラスチックタイ、壁取り付けキット）が同梱されています。
ライトグレーとブラックの2色からお選びいただけます。

STANDARDS

Aginode specification

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

ウォールドロップV2 12of

Characteristics

Construction characteristics	
Colour	Light grey RAL 7035
Material	Thermoplastic
Dimensional characteristics	
Diameter branch cable	3...5 mm
Diameter main cable	6...12 mm
Height	70 mm
Length	203 mm
Max. number of cables	10
Max. number of cassettes	1
Splice number	12
Width	138 mm
Mechanical characteristics	
IK Rating	8
Usage characteristics	
Installation type	Outdoor
Minimum static operating bending radius	15 mm
Operating temperature, range	-40...65 °C
Packaging	Box
RoHS compliant	Yes
U.V resistance	Yes
Watertightness	IP 55

ドキュメンテーション

Instruction manual pdf — 5.25 MB　ダウンロード

Leaflet Facade Solution EN pdf — 5.07 MB　ダウンロード

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.