
# LANmark-OF TB LSZH 2-24C - アジア太平洋地域

**LANMARK-OF タイトバッファ LSZH OM4 2C アクア**

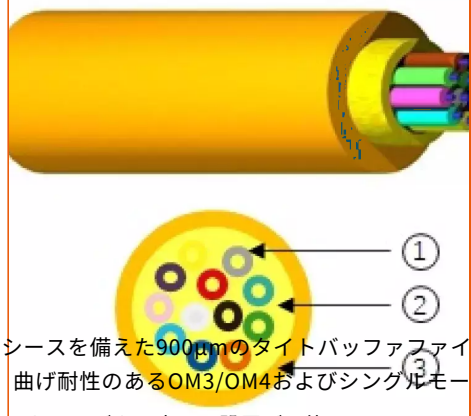


**Aginode Ref:** N177.020

タイトバッファード光ファイバーケーブル

- バックボーン／水平配線用に設計された屋内用ケーブル
- すべてのファイバーグレードに対応
- 低煙・ハロゲンフリー（LSZH）

## 製品概要と用途

Aginode LANmark-OF TB

屋内用光ファイバーケーブルは、屋内用途向けに設計されています。本ケーブルは、伝送媒体を囲む難燃性シースを備えた900µmのタイトバッファファイ
本ケーブルは、強度材としてアラミド糸で被覆されており、最外層にはLSZHジャケットが施されています。曲げ耐性のあるOM3/OM4およびシングルモー

本光ファイバーケーブルは、水平または垂直設置に適したドライ構造を採用しています。屋内防火要件を満たしており、ダクト内への設置が可能です。

- 垂直・水平のいずれの配線にも対応
- 標準的なマルチモードおよびシングルモードファイバーとして適用可能
- LSZHジャケット
- 被覆剥離が容易なタイトバッファードファイバー

## 構造

2〜24芯OFケーブルの断面図に付随する凡例：

1. 900µm タイトバッファードファイバー
2. アラミド糸
3. LSZHジャケット材料

## STANDARDS

ANSI/TIA-568-C.3
IEC 60332-1
IEC 60332-3-24 Cat.C
IEC 60793-2-10
ISO/IEC 11801

*All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.*

# LANmark-OF タイトバッファ LSZH OM4 2C アクア

## Characteristics

| | |
|---|---|
| **Construction characteristics** | |
| Fiber optic type | OM4 50/125 |
| Colour | Aqua |
| **Dimensional characteristics** | |
| Number of optical fibres | 2 |
| Outer Diameter | 4.8 mm |
| **Mechanical characteristics** | |
| Mechanical resistance to impacts (IEC 60794-1-E4) | 100 impacts of 1 N.m |
| Maximum pulling force (IEC 60794-1-2-E1) | 800 N |
| Crush resistance (IEC 60794-1-E3) | 1000 N/100mm |
| **Usage characteristics** | |
| Installation temperature, range | 0...40 °C |
| Storage temperature, range | -30...70 °C |
| Operating temperature, range | -20...60 °C |
| Minimum dynamic operating bending radius | 96.0 mm |
| Minimum static operating bending radius | 48 mm |

*All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.*