
LANmark-OF TB LSZH 48-96C - アジア太平洋地域

LANMARK-OF タイトバッファ LSZH OM3 72C オレンジ

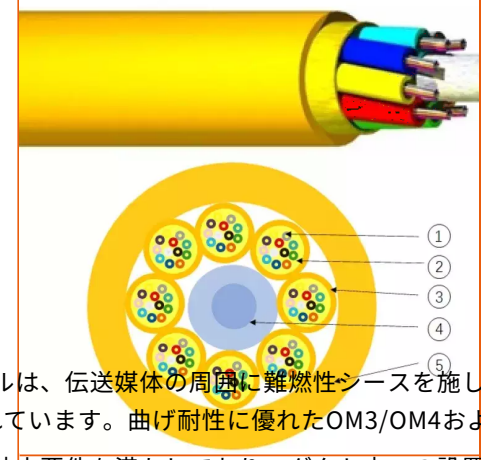

Aginode Ref: N175.043

タイトバッファ光ファイバーケーブル

- バックボーン／水平配線用に設計された屋内用ケーブル
- すべてのファイバーグレードに対応
- 低煙・ハロゲンフリー（LSZH）

製品概要と用途

Aginode LANmark-OF TB
屋内用光ファイバーケーブルは、屋内用途向けに設計されています。この光ファイバーケーブルは、伝送媒体の周囲に難燃性シースを施し
本ケーブルは、強度材としてアラミド糸で被覆されており、最外層はLSZHジャケットで覆われています。曲げ耐性に優れたOM3/OM4およ

本光ファイバーケーブルは、水平または垂直設置に適したドライ構造を採用しています。屋内防火要件を満たしており、ダクト内への設置

• 垂直および水平の両方の設置が可能

•
標準的なマルチモードおよびシングルモードファイバーとして適用可能

• 中心部にFRP補強体

• 最大8本のサブチューブ、各チューブに12cのファイバーを収容

• LSZHジャケット

• 被覆を容易にするタイトバッファードファイバー

STANDARDS

ANSI/TIA-568-C.3
IEC 60332-1
IEC 60332-3-24 Cat.C
IEC 60793-2-10
ISO/IEC 11801

構造

48～96芯OFケーブルの断面図に付随する凡例：

1. 900µm ??????????????
2. ?????
3. ???????????
4. ??FRP????
5. LSZH???????

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

LANmark-OF タイトバッファ LSZH OM3 72C オレンジ

Characteristics

Construction characteristics	
Fiber optic type	OM3 50/125
Strength member	Central FRP
Number of tube layer 1	6
Colour	Orange
Dimensional characteristics	
Number of optical fibres	72
Outer Diameter	17.5 mm
Mechanical characteristics	
Mechanical resistance to impacts (IEC 60794-1-E4)	100 impacts of 1 N.m
Maximum pulling force (IEC 60794-1-2-E1)	1500 N
Crush resistance (IEC 60794-1-E3)	1000 N/100mm
Usage characteristics	
Installation temperature, range	0...40 °C
Storage temperature, range	-30...70 °C
Operating temperature, range	-20...60 °C
Minimum dynamic operating bending radius	350.0 mm
Minimum static operating bending radius	175 mm

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.