

B-LITE LT - マイクロルース・チューブ・ケーブル

MICROCABLE 12X12SM SP1913 BLITE LT

Aginode Ref: Microcable 12x12SM SP1913 BLite LT


This compact cable is used for Access, Distribution, City Network and FTTx applications. It is designed to be quickly installed by blowing in micro-ducts.

Characteristics & Applications

- High blowing distance due to the excellent friction properties of the outer sheath
- Right balance between flexibility and rigidity
- Easy installation with mid span access possibility
- Central strength member reinforcement
- All dielectric design
- Waterproof structure

Construction

- Jelly filled microloose tubes containing coloured fibres
- Central FRP strength member
- Ripcord
- Very Low friction outer sheath

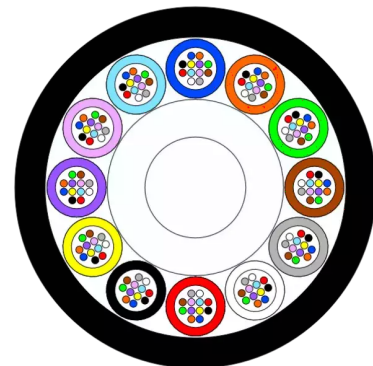

STANDARDS

EN 187000
IEC 60794

Microcable 12x12SM SP1913 BLite LT

Characteristics

Construction characteristics

Construction type	Multitube
Fiber optic type	SM
Metal free	Yes
Outer sheath	HDPE
Strength member	FRP

Dimensional characteristics

Approximate weight	49 kg/km
Nominal outer diameter (mm)	7.6 mm
Number of optical fibres	144
Number of tubes	12

Mechanical characteristics

Crush resistance (IEC 60794-1-E3)	100 N/cm
Maximum admissible traction load (Tm)	100 daN
Maximum tensile load during service (Tl)	20.0 daN

Usage characteristics

Ambient installation temperature, range	0...40 °C
Bending factor when laying	20 (xD)
Installation type	Outdoor - Microduct blowable
Operating temperature, range	-30...60 °C
Storage temperature, range	-40...70 °C