
LANmark-OF TB OFNP 2-48C - アジア太平洋地域

LANMARK-OF タイトバッファ 屋内用 8芯 シングルモード 9/125 G.657.A1 プレナム、OFNP

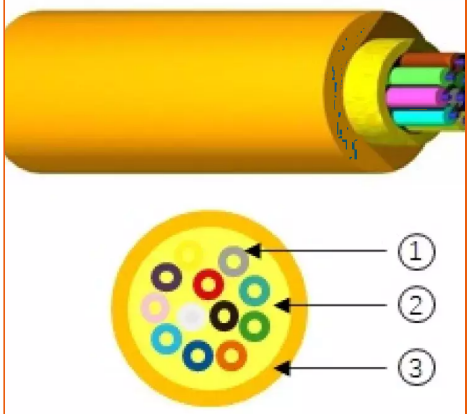

Aginode Ref: N17A.023NP

- タイトバッファ型屋内用光ファイバーケーブル 屋内用ケーブル
- 施工性を高めるアラミド糸
- 直接終端およびスプライシングに対応した設計
- 8ファイバー
- シングルモード OS2 G.657.A1 ケーブル用 曲げ耐性ファイバー

用途

LANmark-OF Tight buffer Indoorは、900
μmのバッファ層を備えたファイバーを採用しています。この2層目の
900 umまでのこの第2の被覆は、ファイバーをさらに保護するとともに、
パッチパネルでのファイバー終端処理時の取り扱いを容易にします。簡単にストリッピングできるタイトバッファ
設計により、1回の操作で10
cm以上にわたってファイバーをストリッピングすることができます。
LANmark-OF タイトバッファ・インドアは、
。また、タイトバッファファイバーは、
ピグテールのスプライシングによる終端処理にも使用できます。
LANmark-OF タイトバッファ インドアのドライ構造により、垂直および
水平設置の両方が可能です。屋内用光ファイバーの要件に準拠しています。また、このケーブルは
は、引き込み方式によりダクト内にも敷設可能です。

STANDARDS

ANSI/TIA-568-C.3
IEC 60793-2-10
ISO/IEC 11801

構造

断面図の凡例：

1. 光ファイバー（900 µm）
2. アラミド糸
3. PVC OFNP素材の外被

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

LANmark-OF タイトバッファ 屋内用 8芯 シングルモード 9/125 G.657.A1 プレナム、OFNP

Characteristics

Construction characteristics	
Fiber optic type	SM (G657.A1)
Colour	Yellow
Dimensional characteristics	
Number of optical fibres	8
Outer Diameter	5.6 mm
Weight	30 g
Mechanical characteristics	
Mechanical resistance to impacts (IEC 60794-1-E4)	100 impacts of 1 N.m
Maximum pulling force (IEC 60794-1-2-E1)	460 N
Crush resistance (IEC 60794-1-E3)	1000 N/100mm
Usage characteristics	
Installation temperature, range	0...40 °C
Storage temperature, range	-30...70 °C
Operating temperature, range	-20...60 °C
Minimum dynamic operating bending radius	112.0 mm
Minimum static operating bending radius	56 mm

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.