
LANmark-OF TB OFNP 2-48C - アジア太平洋地域

LANMARK-OF タイトバッファ 屋内用 36芯 シングルモード 9/125 G.657.A1 プレナム、OFNP

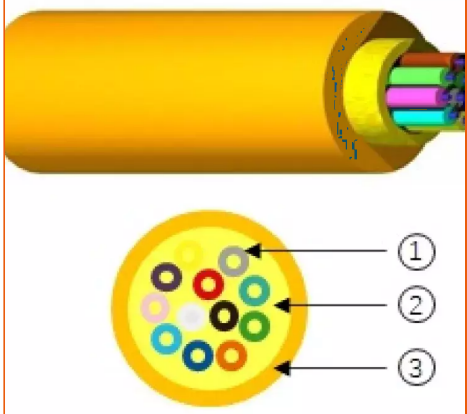

Aginode Ref: N17A.034NP

- タイトバッファ型屋内用光ファイバーケーブル 屋内用ケーブル
- 施工性を高めるアラミド糸
- 直接終端およびスプライシングに対応した設計
- 36ファイバー
- シングルモード OS2 G.657.A1 ケーブル用曲げ耐性ファイバー

用途

LANmark-OF Tight buffer Indoor は、900 um
のバッファ層を備えたファイバを採用しています。この 2 番目の
900 µmまでのコーティングは、ファイバーをさらに保護するとともに、
パッチパネルでのファイバー終端処理時の取り扱いを容易にします。簡単にストリッピングできるタイトバッファ設計により、1回の操作で10
cm以上のファイバーをストリッピングできます。
LANmark-OF タイトバッファ・インドアは、
。また、タイトバッファ光ファイバーは、
ピグテールのスプライシングによる終端処理も可能です。
LANmark-OF タイトバッファ インドアのドライ構造により、垂直および
水平設置の両方が可能です。本製品は、屋内用ファイバーの要件に準拠しています。また、これらのケーブルは
は、引き込み方式によりダクト内にも敷設可能です。

STANDARDS

ANSI/TIA-568-C.3
IEC 60793-2-10
ISO/IEC 11801

構造

断面図の凡例：

1. 光ファイバ（900 µm）
2. アラミド糸
3. PVC OFNP素材の外被

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

LANmark-OF タイトバッファ 屋内用 36芯 シングルモード 9/125 G.657.A1 プレナム、OFNP

Characteristics

Construction characteristics	
Fiber optic type	SM (G657.A1)
Colour	Yellow
Dimensional characteristics	
Number of optical fibres	36
Outer Diameter	14.5 mm
Weight	200 g
Mechanical characteristics	
Mechanical resistance to impacts (IEC 60794-1-E4)	100 impacts of 1 N.m
Maximum pulling force (IEC 60794-1-2-E1)	660 N
Crush resistance (IEC 60794-1-E3)	1000 N/100mm
Usage characteristics	
Installation temperature, range	0...40 °C
Storage temperature, range	-30...70 °C
Operating temperature, range	-20...60 °C
Minimum dynamic operating bending radius	290.0 mm
Minimum static operating bending radius	145 mm

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.