
B-LITE 3 - マイクロバンドルケーブル

マイクロケーブル 6X24SM SP1956 B-LITE^3

Aginode Ref: SP1956

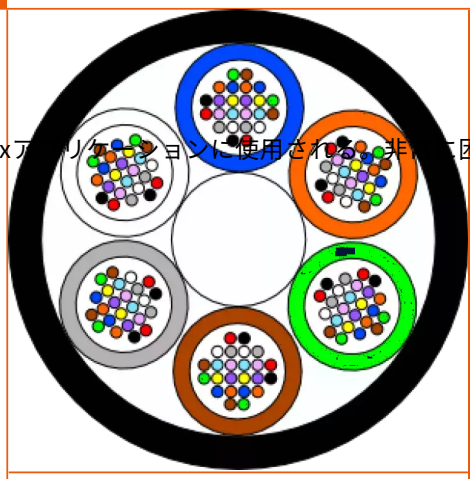

このコンパクトなケーブルは、アクセス、ディストリビューション、シティネットワーク、FTTxアプリケーションに使用される、非[illegible]

特性と用途

- アウターシースの優れた摩擦特性による高いブローイング距離
- 柔軟性と剛性の適切なバランス
- 中間スパンへのアクセスが可能なため、設置が容易
- 容易なマイクロバンドルストリップ性
- 中央強度部材の補強
- 全誘電体設計
- 防水構造

構造

- カラー光ファイバー入りゼリー入りマイクロバンドル
- 中央FRP強度部材
- 超低摩擦外装
- PAアウターシース

STANDARDS

EN 187000
IEC 60794

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

マイクロケーブル 6x24SM SP1956 B-LITE^3

Characteristics

Construction characteristics	
Colour	Black
Fiber optic type	G657A1 - 200 µm
Armour type	Unarmoured
Outer sheath	PA
Metal free	Yes
Strength member	FRP
Construction type	Multibundle
Dimensional characteristics	
Number of tubes	6
Approximate weight	26.3 kg/km
Number of optical fibres	144
Nominal outer diameter (mm)	5.2 mm
Mechanical characteristics	
Maximum tensile load during service (Tl)	25.0 daN
Maximum admissible traction load (Tm)	50 daN
Crush resistance (IEC 60794-1-E3)	100 N/cm
Usage characteristics	
Operating temperature, range	-30...70 °C
Storage temperature, range	-40...70 °C
Installation type	Outdoor - Microduct blowable
Ambient installation temperature, range	0...40 °C
Bending factor when laying	20 (xD)

ドキュメンテーション

Leaflet - B-LITE3 Microcables pdf — 2.83 MB　ダウンロード

販売および配送情報

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

標準マーキング

Aginode - B-Lite^3 - SPxxxx - FIBRE OPTIC CABLE - XX*YYY - FB - TN - メトリック

XX = ファイバ数
YY = ファイバータイプ
FB = ベルギー・フレーム社製
TN = トレーサビリティ番号

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.